Characterizations of input-to-state stability for infinite-dimensional systems

Andrii Mironchenko and Fabian Wirth

arXiv:1701.08952v1 [math.OC] 31 Jan 2017

***Abstract*—We prove characterizations of ISS for a large class of infinite-dimensional control systems, including differential equations in Banach spaces, time-delay systems, ordinary differential equations, switched systems. These characterizations generalize well-known criteria of ISS, proved by Sontag and Wang in [2] for ODE systems. For the special case of differential equations in Banach spaces we prove even broader criteria for ISS property. Using an important technical result from [2] we show that the characterizations obtained in [2] are a special case of our results. We introduce the new notion of strong ISS which is equivalent to ISS in the ODE case, but which is strictly weaker than ISS in the infinite-dimensional setting and prove several criteria for sISS property. At the same time we show by means of counterexamples, that many characterizations, which are valid in the ODE case, are not true for general infinite-dimensional systems.**

***Index Terms*—input-to-state stability, nonlinear systems, infinite-dimensional systems.**

I. Introduction

For ordinary differential equations, the concept of input-to-state stability (ISS) was introduced in [3]. The corresponding theory is by now well developed with a firm theoretical basis. A variety of powerful tools for the investigation of ISS is available and a multitude of applications have been developed in nonlinear control theory, in particular, to robust stabilization of nonlinear systems [4], design of nonlinear observers [5], analysis of large-scale networks [6], [7], [8] etc.

The success of ISS theory of ordinary differential equations and the need of proper tools for robust stability analysis of partial differential equations motivated the development of ISS theory in infinite-dimensional setting [9], [10], [11], [12], [13], [14], [15], [16].

Characterizations of ISS in terms of other stability properties [17], [2] are among the central theoretical results in ISS theory of finite-dimensional systems. In [17] Sontag and Wang have shown that ISS is equivalent to the existence of a smooth ISS Lyapunov function and in [2] the same authors proved a so-called ISS superposition theorem, saying that ISS is equivalent to the combination of an asymptotic gain (AG) property of the system with inputs together with global/local stability (GS/LS), and even local stability of the undisturbed system (0-LS):

$$\text{AG} \wedge \text{GS} \;\Leftrightarrow\; \text{AG} \wedge \text{LS} \;\Leftrightarrow\; \text{AG} \wedge \text{0-LS} \;\Leftrightarrow\; \text{ISS}, \qquad (1)$$

see [17], [2].

These theorems greatly simplify the proofs of other fundamental results, such as small-gain theorems [7], and are useful for analysis of other classes of systems, such as time-delay systems in the Lyapunov-Razumikhin framework [18], [19], hybrid systems [20] to name a few examples.

The significance of these characterizations of ISS makes it desirable to extend the results to infinite-dimensional systems. In the recent paper [15] it was shown that uniform asymptotic stability at zero, local ISS and the existence of a LISS Lyapunov function are equivalent properties for a system of the form

$$\dot{x}(t) = Ax(t) + f(x(t),u(t)), \quad x(t) \in X,\ u(t) \in U, \qquad (2)$$

provided the right hand side has some sort of uniform continuity with respect to u. Here X is a Banach space, U is a linear normed space, A is the generator of a C_0-semigroup $\{T(t),\, t \geq 0\}$ and $f : X \times U \to X$ is sufficiently regular. It was also demonstrated by means of a counterexample, that without this additional uniformity this characterization does not hold.

In addition, in [15] a system of the form (2) was constructed, which is locally ISS (LISS), uniformly globally asymptotically stable for a zero input (0-UGAS), globally stable (GS) and which has an asymptotic gain (AG), but which is not ISS, which strikingly contrasts to the ODE case, see (1).

This naturally leads to a set of challenging questions: which combinations of properties considered in [2] are equivalent to ISS for infinite-dimensional systems? Is it possible to generalize all characterizations of ISS from [2] to the general infinite-dimensional setting, and under which conditions? Can one classify the properties, which are not equivalent to ISS in a natural way? Is it possible to introduce a reasonable ISS-like property which will be equivalent to ISS in finite dimensions, but weaker than ISS for general systems (2)?

In this paper we are going to answer these questions and obtain a broad picture of relationships between stability properties for a large class of infinite-dimensional control systems, encompassing ODEs, differential equations in Banach spaces, time-delay systems, switched systems etc.

In view of the examples in [15] we known that a "naive" generalization of the equivalences (1) is not possible. These preliminary studies reveal a lack of uniformity with respect to the state in the definition of AG and other properties. These are frequently automatic in finite dimensions due to local compactness of the state space. In infinite dimensions

This research has been supported by the DFG under grant "Input-to-state stability and stabilization of distributed parameter systems" (Wi1458/13-1). This paper is a substantially revised and expanded version of the conference paper presented at the 22nd International Symposium on Mathematical Theory of Networks and Systems (MTNS 2016) [1].

A. Mironchenko is with Faculty of Computer Science and Mathematics, University of Passau, 94030 Passau, Germany. Email: andrii.mironchenko@uni-passau.de. Corresponding author.

F. Wirth is with Faculty of Computer Science and Mathematics, University of Passau, 94030 Passau, Germany. Email: fabian.lastname@uni-passau.de.

this becomes a requirement. A further difficulty we encounter in infinite-dimensional systems is that, in contrast to the ODE case, forward completeness or global asymptotic stability do not guarantee the boundedness of reachability sets on finite time intervals. This is shown in the sequel by means of a counterexample.

In order to overcome these difficulties, we introduce several novel stability notions, which naturally extend the concepts of limit property and of asymptotic gain. Namely: the uniform limit property (ULIM), the strong limit property (sLIM) as well as strong asymptotic gain property (sAG). It turns out that ULIM is the key to obtaining generalizations of the characterizations of ISS. For the special case of systems on Banach spaces we obtain additional characterizations in terms of ULIM together with local stability of the undisturbed system. Using sLIM and sAG notion we can characterize what we call strong ISS (sISS). For linear systems without inputs this concept reduces to strong stability of the semigroup T, whereas ISS for linear systems without inputs corresponds to exponential stability of T. In order to characterize strong ISS we introduce the strong asymptotic gain (sAG) property, which is weaker than UAG, and prove that strong ISS is equivalent to global stability together with sAG.

In the finite dimensional case, We show that the sLIM and ULIM properties are equivalent to the usual limit property introduced in [2]. This proof relies in an essential manner on tools already developed in [2]. On the other hand ULIM is strictly stronger than sLIM or LIM already for linear infinite-dimensional systems. In particular, we recover all characterizations of ISS for ODEs from [2] as a special case of our results.

As argued above, for (2) ISS is no longer equivalent to combinations of notions which are not fully uniform - like AG $\wedge$ GS or AG $\wedge$ 0-UGAS. By means of counterexamples we show that these combinations are no longer equivalent with each other. Instead, they can be classified into several groups, according to the type and grade of uniformity.

The manuscript is structured as follows. In Section II we introduce the main concepts which will be used throughout the paper. In Section III we motivate the topic of the paper in more precise terms, state the main result of the paper and explain the way it is proved. The subsequent sections contain the proof of the main result. First, in Section IV we prove characterizations of ISS for general infinite-dimensional systems in terms of uniform limit and uniform attraction properties. In Section V a concept of strong ISS is introduced and characterized in terms of strong limit and strong asymptotic gain properties. In Section VI we construct four counterexamples, which clarify the interrelations between the different stability notions as well as some of the difficulties and obstacles arising in infinite-dimensional ISS theory.

The results in this paper are closely connected with recently submitted papers on Lyapunov characterizations of ISS [21] and on characterizations of UGAS for infinite-dimensional systems with disturbances by means of non-coercive Lyapunov functions [22]. Some results of these papers as well as of [15] are exploited in this paper.

II. Preliminaries

In this paper we consider abstract, axiomatically defined, time-invariant, and forward complete systems.

Definition 1. *Consider the triple $\Sigma = (X, \mathscr{U}, \phi)$ consisting of*

(i) A normed linear space $(X, \|\cdot\|_X)$, called the state space, endowed with the norm $\|\cdot\|_X$.

(ii) A set of input values U, which is a nonempty subset of a normed linear space S_u.

(iii) A space of inputs $\mathscr{U} \subset \{f : \mathbb{R}_+ \to U\}$ endowed with a norm $\|\cdot\|_{\mathscr{U}}$ which satisfies the following two axioms:
The axiom of shift invariance states that for all $u \in \mathscr{U}$ and all $\tau \geq 0$ the time shift $u(\cdot + \tau) \in \mathscr{U}$ with $\|u\|_{\mathscr{U}} \geq \|u(\cdot + \tau)\|_{\mathscr{U}}$.
The axiom of concatenation is defined by the requirement that for all $u_1, u_2 \in \mathscr{U}$ and for all $t > 0$ the concatenation of u_1 and u_2 at time t

$$u(\tau) := \begin{cases} u_1(\tau), & \text{if } \tau \in [0,t], \\ u_2(\tau - t), & \text{otherwise}, \end{cases} \tag{3}$$

belongs to $\mathscr{U}$.

(iv) A transition map $\phi : \mathbb{R}_+ \times X \times \mathscr{U} \to X$.

The triple Σ is called a (forward complete) dynamical system, if the following properties hold:

(Σ1) Forward completeness: for every $(x,u) \in X \times \mathscr{U}$ and for all $t \geq 0$ the value $\phi(t,x,u) \in X$ is well-defined.

(Σ2) The identity property: for every $(x,u) \in X \times \mathscr{U}$ it holds that $\phi(0,x,u) = x$.

(Σ3) Causality: for every $(t,x,u) \in \mathbb{R}_+ \times X \times \mathscr{U}$, for every $\tilde{u} \in \mathscr{U}$, such that $u(s) = \tilde{u}(s)$, $s \in [0,t]$ it holds that $\phi(t,x,u) = \phi(t,x,\tilde{u})$.

(Σ4) Continuity: for each $(x,u) \in X \times \mathscr{U}$ the map $t \mapsto \phi(t,x,u)$ is continuous.

(Σ5) The cocycle property: for all $t,h \geq 0$, for all $x \in X$, $u \in \mathscr{U}$ we have $\phi(h, \phi(t,x,u), u(t+\cdot)) = \phi(t+h,x,u)$.

This class of systems encompasses control systems generated by ordinary differential equations (ODEs), switched systems, time-delay systems, evolution partial differential equations (PDEs), abstract differential equations in Banach spaces and many others. We single out two particular cases which will be of interest.

The following class of semi-linear infinite-dimensional systems has been studied in [15]. Let A be the generator of a strongly continuous semigroup T of bounded linear operators on X and let $f : X \times U \to X$. Consider the system

$$\dot{x}(t) = Ax(t) + f(x(t), u(t)), \quad x(t) \in X,\ u(t) \in U. \tag{4}$$

We study mild solutions of (4), i.e. solutions $x : [0,\tau] \to X$ of the integral equation

$$x(t) = T(t)x(0) + \int_0^t T(t-s) f(x(s), u(s)) ds, \tag{5}$$

belonging to the space of continuous functions $C([0,\tau], X)$ for some $\tau > 0$.

In the sequel we assume that the state space X is a Banach space, the set of input values U is a normed linear space and that the input functions belong to the space $\mathscr{U} := PC(\mathbb{R}_+, U)$

of globally bounded, piecewise continuous functions $u:\mathbb{R}_+\to U$, which are right continuous. The norm of $u\in\mathscr{U}$ is given by $\|u\|_{\mathscr{U}}:=\sup_{t\geq 0}\|u(t)\|_U$.

For system (4), we use the following assumption concerning the nonlinearity f.

Assumption 1. *We assume that:*

(i) $f:X\times U\to X$ *is Lipschitz continuous on bounded subsets of* X*, uniformly with respect to the second argument, i.e. for all* $C>0$*, there exists a* $L_f(C)>0$*, such that for all* $x,y\in B_C$ *and for all* $v\in U$*, it holds that*

$$\|f(x,v)-f(y,v)\|_X\leq L_f(C)\|x-y\|_X. \tag{6}$$

(ii) $f(x,\cdot)$ *is continuous for all* $x\in X$.

(iii) $f(0,0)=0$.

Since $\mathscr{U}=PC(\mathbb{R}_+,U)$, Assumption 1 ensures that mild solutions of initial value problems of (4) exist and are unique, according to a variation of a classical existence and uniqueness theorem [23, Proposition 4.3.3]. For system (4) forward-completeness is a further assumption. The conditions (Σ2)-(Σ5) are satisfied by construction.

The second case of interest are finite-dimensional systems. Let $X=\mathbb{R}^n$, $U=\mathbb{R}^m$ and $\mathscr{U}:=L_\infty(\mathbb{R}_+,U)$ (the space of globally essentially bounded functions endowed with the essential supremum norm). For $f:X\times U\to X$ consider the system

$$\dot{x}=f(x,u). \tag{7}$$

We assume that f is continuous and locally Lipschitz continuous in x uniformly in u. With this assumption and the additional assumption of forward-completeness classical Carathéodory theory implies (Σ2)-(Σ5). We will sometimes briefly speak of ODE systems, when referring to (7).

We start with some basic definitions. Without loss of generality we restrict our analysis to fixed points of the form $(0,0)\in X\times\mathscr{U}$, so that we tacitly assume that the zero input is an element of $\mathscr{U}$.

Definition 2. *Consider a system* $\Sigma=(X,\mathscr{U},\phi)$*. We call* $0\in X$ *an equilibrium point (of the undisturbed system) if* $\phi(t,0,0)=0$ *for all* $t\geq 0$.

For describing the behavior of solutions near the equilibrium the following notion is of importance

Definition 3. *Consider a system* $\Sigma=(X,\mathscr{U},\phi)$ *with equilibrium point* $0\in X$*. We say that the equilibrium point is robust if for every* $\varepsilon>0$ *and for any* $h>0$ *there exists a* $\delta=\delta(\varepsilon,h)>0$*, so that*

$$t\in[0,h],\ \|x\|_X\leq\delta,\ \|u\|_{\mathscr{U}}\leq\delta\ \Rightarrow\ \|\phi(t,x,u)\|_X\leq\varepsilon. \tag{8}$$

In this case we will also say that Σ *has the REP property.*

Even nonuniformly globally aymptotically stable systems do not always have uniform bounds for their reachability sets on finite intervals (see Example 2). Systems exhibiting such bounds deserve a special name.

Definition 4. *We say that* $\Sigma=(X,\mathscr{U},\phi)$ *has bounded reachability sets (BRS), if for any* $C>0$ *and any* $\tau>0$ *it holds that*

$$\sup\{\|\phi(t,x,u)\|_X\ :\ \|x\|_X\leq C,\ \|u\|_{\mathscr{U}}\leq C,\ t\in[0,\tau]\}<\infty.$$

Notation: We use the following notation. The nonnegative reals are $\mathbb{R}_+:=[0,\infty)$. The open ball of radius r around 0 in X is denoted by $B_r:=\{x\in X:\|x\|_X<r\}$. Similarly, $B_{r,\mathscr{U}}:=\{u\in\mathscr{U}:\|u\|_{\mathscr{U}}<r\}$. By $\overline{\lim}$ we denote the superior limit.

For the formulation of stability properties the following classes of comparison functions are useful:

$$\begin{aligned}
\mathscr{K} &:=\{\gamma:\mathbb{R}_+\to\mathbb{R}_+\mid \gamma \text{ is continuous, strictly increasing and } \gamma(0)=0\},\\
\mathscr{K}_\infty &:=\{\gamma\in\mathscr{K}\mid \gamma \text{ is unbounded}\},\\
\mathscr{L} &:=\{\gamma:\mathbb{R}_+\to\mathbb{R}_+\mid \gamma \text{ is continuous and strictly decreasing with } \lim_{t\to\infty}\gamma(t)=0\},\\
\mathscr{KL} &:=\{\beta:\mathbb{R}_+\times\mathbb{R}_+\to\mathbb{R}_+\mid \beta \text{ is continuous, } \beta(\cdot,t)\in\mathscr{K},\ \beta(r,\cdot)\in\mathscr{L},\ \forall t\geq 0,\ \forall r>0\}.
\end{aligned}$$

We continue with the list of stability notions, which will be used in the sequel. Several of these were already introduced in [2] while others appear here for the first time as they only become relevant in the infinite-dimensional case. In the finite-dimensional case these new notions coincide with the classic ones. We discuss this issue in Section VIII.

A. Stability notions for undisturbed systems

We start with systems without inputs.

Definition 5. *System* $\Sigma=(X,\mathscr{U},\phi)$ *is called*

- *uniformly stable at zero (0-ULS), if there exists a* $\sigma\in\mathscr{K}_\infty$ *and* $r>0$ *so that*
$$\|\phi(t,x,0)\|_X\leq\sigma(\|x\|_X)\quad\forall x\in\overline{B_r}\ \forall t\geq 0. \tag{9}$$
- *uniformly globally stable at zero (0-UGS), if there exists a* $\sigma\in\mathscr{K}_\infty$ *so that*
$$\|\phi(t,x,0)\|_X\leq\sigma(\|x\|_X)\quad\forall x\in X\ \forall t\geq 0. \tag{10}$$
- *globally attractive at zero (0-GATT), if*
$$\lim_{t\to\infty}\|\phi(t,x,0)\|_X=0\quad\forall x\in X. \tag{11}$$
- *a system with the limit property at zero (0-LIM), if*
$$\inf_{t\geq 0}\|\phi(t,x,0)\|_X=0\quad\forall x\in X.$$
- *uniformly globally attractive at zero (0-UGATT), if for all* $\varepsilon,\delta>0$ *there is a* $\tau=\tau(\varepsilon,\delta)<\infty$ *such that*
$$t\geq\tau,\ x\in\overline{B_\delta}\quad\Rightarrow\quad\|\phi(t,x,0)\|_X\leq\varepsilon. \tag{12}$$
- *globally asymptotically stable at zero (0-GAS), if* Σ *is 0-ULS and 0-GATT.*
- *asymptotically stable at zero uniformly with respect to the state (0-UAS), if there exists a* $\beta\in\mathscr{KL}$ *and* $r>0$*, such that*
$$\|\phi(t,x,0)\|_X\leq\beta(\|x\|_X,t)\quad\forall x\in\overline{B_r}\ \forall t\geq 0. \tag{13}$$
- *globally asymptotically stable at zero uniformly with respect to the state (0-UGAS), if it is 0-UAS and* (13) *holds for all* $x\in X$.

We stress the difference between the uniform notions 0-UGATT and 0-UGAS and the nonuniform notions 0-GATT and 0-GAS. For 0-GATT systems all trajectories converge to the origin, but their speed of convergence may differ drastically for initial values with the same norm, in contrast to 0-UGATT systems. The notions of 0-ULS and 0-UGS are uniform in the sense that there exists an upper bound of the norm of trajectories which is equal for initial states with the same norm.

Remark 1. *For ODE systems 0-GAS is equivalent to 0-UGAS, but it is weaker than 0-UGAS in the infinite-dimensional case. For linear systems $\dot{x} = Ax$, where A generates a strongly continuous semigroup, the Banach-Steinhaus theorem implies that 0-GAS is equivalent to strong stability of the associated semigroup T and implies the UGS property.*

For systems that are 0-LIM, trajectories approach the origin arbitrarily closely. Obviously, 0-GATT implies 0-LIM.

B. Stability notions for systems with inputs

We now consider systems $\Sigma = (X, \mathscr{U}, \phi)$ with inputs.

Definition 6. *System $\Sigma = (X, \mathscr{U}, \phi)$ is called*

- *uniformly locally stable (ULS), if there exist $\sigma, \gamma \in \mathscr{K}_\infty$ and $r > 0$ such that for all $x \in \overline{B_r}$ and all $u \in \overline{B_{r,\mathscr{U}}}$:*

$$\|\phi(t,x,u)\|_X \leq \sigma(\|x\|_X) + \gamma(\|u\|_{\mathscr{U}}) \quad \forall t \geq 0. \tag{14}$$

- *uniformly globally stable (UGS), if there exist $\sigma, \gamma \in \mathscr{K}_\infty$ such that for all $x \in X, u \in \mathscr{U}$ the estimate (14) holds.*
- *practically uniformly globally stable (pUGS), if there exist $\sigma, \gamma \in \mathscr{K}_\infty$ and $c > 0$ such that for all $x \in X$, and all $u \in \mathscr{U}$ it holds that*

$$\|\phi(t,x,u)\|_X \leq \sigma(\|x\|_X) + \gamma(\|u\|_{\mathscr{U}}) + c \quad \forall t \geq 0. \tag{15}$$

Remark 2. *It is easy to see that the notion of pUGS is equivalent to the boundedness property (BND), as defined in [2, p. 1285]. Also pUGS implies BRS, but the converse fails in general as BRS is only a property of the finite-time reachable sets.*

C. Attractivity properties for systems with inputs

We define the attractivity properties for systems with inputs.

Definition 7. *System $\Sigma = (X, \mathscr{U}, \phi)$ has the*

- *asymptotic gain (AG) property, if there is a $\gamma \in \mathscr{K}_\infty \cup \{0\}$ such that for all $\varepsilon > 0$, for all $x \in X$ and for all $u \in \mathscr{U}$ there exists a $\tau = \tau(\varepsilon, x, u) < \infty$ such that*

$$t \geq \tau \quad \Rightarrow \quad \|\phi(t,x,u)\|_X \leq \varepsilon + \gamma(\|u\|_{\mathscr{U}}). \tag{16}$$

- *strong asymptotic gain (sAG) property, if there is a $\gamma \in \mathscr{K}_\infty \cup \{0\}$ such that for all $x \in X$ and for all $\varepsilon > 0$ there exists a $\tau = \tau(\varepsilon, x) < \infty$ such that for all $u \in \mathscr{U}$*

$$t \geq \tau \quad \Rightarrow \quad \|\phi(t,x,u)\|_X \leq \varepsilon + \gamma(\|u\|_{\mathscr{U}}). \tag{17}$$

- *uniform asymptotic gain (UAG) property, if there exists a $\gamma \in \mathscr{K}_\infty \cup \{0\}$ such that for all $\varepsilon, r > 0$ there is a $\tau = \tau(\varepsilon, r) < \infty$ such that for all $u \in \mathscr{U}$ and all $x \in B_r$*

$$t \geq \tau \quad \Rightarrow \quad \|\phi(t,x,u)\|_X \leq \varepsilon + \gamma(\|u\|_{\mathscr{U}}). \tag{18}$$

All three properties AG, sAG and UAG imply that all trajectories converge to the ball of radius $\gamma(\|u\|_{\mathscr{U}})$ around the origin as $t \to \infty$. The difference between AG, sAG and UAG is in the kind of dependence of τ on the states and inputs. In UAG systems this time depends (besides ε) only on the norm of the state, in sAG systems it depends on the state x (and may vary for different states with the same norm), but it does not depend on u. In AG systems τ depends both on x and on u. For systems without inputs, the AG and sAG properties are reduced to 0-GATT, and the UAG property becomes 0-UGATT.

Next we define properties, similar to AG, sAG and UAG, which formalize reachability of the ε-neighborhood of the ball $B_{\gamma(\|u\|_{\mathscr{U}})}$ by trajectories of Σ.

Definition 8. *We say that $\Sigma = (X, \mathscr{U}, \phi)$ has the*

(i) *limit property (LIM) if there exists $\gamma \in \mathscr{K}$ such that for all $x \in X$, $u \in \mathscr{U}$ and $\varepsilon > 0$ there is a $t = t(x,u,\varepsilon)$:*

$$\|\phi(t,x,u)\|_X \leq \varepsilon + \gamma(\|u\|_{\mathscr{U}}).$$

(ii) *strong limit property (sLIM), if there exists $\gamma \in \mathscr{K}$ so that for every $\varepsilon > 0$ and for every $x \in X$ there exists $\tau = \tau(\varepsilon, x)$ such that for all $u \in \mathscr{U}$ there is a $t \leq \tau$:*

$$\|\phi(t,x,u)\|_X \leq \varepsilon + \gamma(\|u\|_{\mathscr{U}}). \tag{19}$$

(iii) *uniform limit property (ULIM), if there exists $\gamma \in \mathscr{K}$ so that for every $\varepsilon > 0$ and for every $r > 0$ there exists a $\tau = \tau(\varepsilon, r)$ such that for all x with $\|x\|_X \leq r$ and all $u \in \mathscr{U}$ there is a $t \leq \tau$ such that*

$$\|\phi(t,x,u)\|_X \leq \varepsilon + \gamma(\|u\|_{\mathscr{U}}). \tag{20}$$

Remark 3. *It is easy to see that AG is equivalent to the existence of a $\gamma \in \mathscr{K}_\infty$ for which*

$$\overline{\lim_{t\to\infty}} \|\phi(t,x,u)\|_X \leq \gamma(\|u\|_{\mathscr{U}})$$

and LIM is equivalent to existence of a $\gamma \in \mathscr{K}_\infty$ so that

$$\inf_{t\geq 0} \|\phi(t,x,u)\|_X \leq \gamma(\|u\|_{\mathscr{U}}),$$

where in both cases the conditions hold for all $x \in X, u \in \mathscr{U}$. In particular, AG implies LIM and on the other hand it is easy to see that LIM and UGS together imply AG.

Remark 4. *For systems without inputs the notions of sLIM and LIM coincide and are strictly weaker than the ULIM, even for linear infinite-dimensional systems generated by C_0-semigroups, see [22].*

D. Input-to-state stability

Now we proceed to the main concept of this paper:

Definition 9. *System $\Sigma = (X, \mathscr{U}, \phi)$ is called (uniformly) input-to-state stable (ISS), if there exist $\beta \in \mathscr{KL}$ and $\gamma \in \mathscr{K}$ such that for all $x \in X$, $u \in \mathscr{U}$ and $t \geq 0$ it holds that*

$$\|\phi(t,x,u)\|_X \leq \beta(\|x\|_X, t) + \gamma(\|u\|_{\mathscr{U}}). \tag{21}$$

The local counterpart of the ISS property is

Definition 10. *System $\Sigma = (X, \mathscr{U}, \phi)$ is called (uniformly) locally input-to-state stable (LISS), if there exist $\beta \in \mathscr{KL}$, $\gamma \in \mathscr{K}$ and $r > 0$ such that the inequality* (21) *holds for all $x \in \overline{B_r}$, $u \in \overline{B_{r,\mathscr{U}}}$ and $t \geq 0$.*

Lyapunov functions are a powerful tool for the investigation of ISS and local ISS. For the class of semilinear systems (4) they are defined as follows. Let $x \in X$ and V be a real-valued function defined in a neighborhood of x. The Dini derivative of V at x corresponding to the input u along the trajectories of Σ is defined by

$$\dot{V}_u(x) = \overline{\lim_{t \to +0}} \frac{1}{t}(V(\phi(t,x,u)) - V(x)). \tag{22}$$

Definition 11. *Let $D \subset X$ be open with $0 \in D$. A continuous function $V : D \to \mathbb{R}_+$ is called a LISS Lyapunov function for a system $\Sigma = (X, \phi, \mathscr{U})$, if there exist $r > 0$, $\psi_1, \psi_2 \in \mathscr{K}_\infty$, $\alpha \in \mathscr{K}_\infty$ and $\sigma \in \mathscr{K}$ such that $\overline{B_r} \subset D$,*

$$\psi_1(\|x\|_X) \leq V(x) \leq \psi_2(\|x\|_X), \quad \forall x \in \overline{B_r} \tag{23}$$

and the Dini derivative of V along the trajectories of Σ satisfies

$$\dot{V}_u(x) \leq -\alpha(\|x\|_X) + \sigma(\|u\|_{\mathscr{U}}) \tag{24}$$

for all $x \in \overline{B_r}$ and $u \in \overline{B_{r,\mathscr{U}}}$.

(i) A function $V : X \to \mathbb{R}_+$ is called an ISS Lyapunov function, if (24) *holds for all $x \in X, u \in \mathscr{U}$.*

(ii) $V : D \to \mathbb{R}_+$ is called a (0-UAS) Lyapunov function, if (23) *is satisfied and if* (24) *holds for $u \equiv 0$.*

Remark 5. *We point out that on the right hand side of the dissipation inequality* (24) *the growth bound is given in terms of $\|u\|_{\mathscr{U}}$ instead of the more familiar $\|u\|_U$ for $u \in U$. For some input spaces this is a necessity, but for the input space of bounded piecewise continuous functions, as well as for $L^\infty(\mathbb{R}_+, U)$ it is equivalent to require the condition*

$$\dot{V}_u(x) \leq -\alpha(\|x\|_X) + \sigma(\|u\|_U)$$

for all $x \in X, u \in U$. This may be shown similarly to the proof for "implication form" Lyapunov functions provided in, [9, Proposition 5].

III. Motivation and main result

The primary motivation for this manuscript is the following fundamental result due to Sontag and Wang [17], [2], which we informally described in the introduction.

Proposition 1. *For a forward complete, finite dimensional system* (7)*, the equivalences depicted in Figure 1 hold.*

In particular, ISS is not only equivalent to the uniform properties (UAG, existence of a smooth ISS Lyapunov function), but also to the combination of the limit property with local stability of the system.

In [15] characterizations of LISS for nonlinear infinite-dimensional systems of the form (4) have been studied and the following result [15, Theorem 4] has been obtained:

Theorem 2. *Let Assumption 1 hold and assume furthermore*

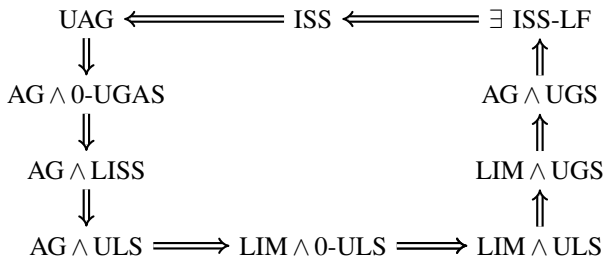

Fig. 1: Characterizations of ISS in finite dimensions

$\diamondsuit$ *there exist $\sigma \in \mathscr{K}$ and $r > 0$ so that for all $v \in B_{r,U}$ and all $x \in \overline{B}_r$ we have*

$$\|f(x,v) - f(x,0)\|_X \leq \sigma(\|v\|_U). \tag{25}$$

Then the following statements are equivalent:

(i) (4) *is 0-UAS.*

(ii) (4) *has a Lipschitz continuous 0-UAS Lyapunov function.*

(iii) (4) *has a Lipschitz continuous LISS Lyapunov function.*

(iv) (4) *is LISS.*

This result is reminiscent of a classical result on the robustness of the 0-UAS property [24, Corollary 4.2.3]. As an easy consequence we have that for system (4) 0-UGAS implies LISS, which has already been shown in [2, Lemma I.1] for ODE systems.

In the ODE case the assumption "$\diamondsuit$" in Proposition 2 is automatically fulfilled. However, this assumption cannot be dropped for infinite-dimensional systems (4) as demonstrated by a counterexample in [15, Section 4]. We recall another example from [15, Section 5]:

Example 1. *Consider a system Σ with state space $X = l_1 := \{(x_k)_{k=1}^\infty : \sum_{k=1}^\infty |x_k| < \infty\}$ and input space $\mathscr{U} := PC(\mathbb{R}_+, \mathbb{R})$. Let the dynamics of the k-th mode of Σ be given by*

$$\dot{x}_k(t) = -\frac{1}{1 + |u(t)|^k} x_k(t). \tag{26}$$

□

According to the analysis in [15] system (26) is 0-UGAS, sAG, AG with zero gain, UGS with zero gain, and LISS with zero gain, but it is not ISS (from the main result of the present paper it follows that (26) is not ULIM). *This means that all characterizations of ISS in terms of AG or LIM together with GS or 0-UGAS, depicted in Figure 1 are no longer valid for infinite-dimensional systems. This makes the characterization of ISS in infinite dimensions a challenging problem.*

In order to reflect the essential distinctions occurring in these stability properties, and to obtain a proper generalization of the criteria for ISS, developed by Sontag and Wang in Proposition 1, we introduce several new concepts. These are the uniform and the strong limit property (ULIM and sLIM), strong input-to-state stability (sISS) as well as the strong asymptotic gain property (sAG). These notions naturally extend the notions of LIM, AG and UAG introduced in [2].

The first positive result in characterizations of ISS is the following Lyapunov characterization of ISS, shown in [21].

Theorem 3. *Assume that $f : X \times U \to X$ is bi-Lipschitz continuous on bounded subsets, which means that two following properties hold:*

1) $\forall C > 0\ \exists L_f^1(C) > 0$, *such that* $\forall x, y \in X : \|x\|_X \leq C,\ \|y\|_X \leq C$ *and* $\forall v \in U$, *it holds that*
$$\|f(x,v) - f(y,v)\|_X \leq L_f^1(C)\|x - y\|_X.$$
2) $\forall C > 0\ \exists L_f^2(C) > 0$, *such that* $\forall u, v \in U : \|u\|_U \leq C,\ \|v\|_U \leq C$ *and* $\forall x \in X$, *it holds that*
$$\|f(x,u) - f(x,v)\|_X \leq L_f^2(C)\|u - v\|_U.$$

Then (4) *is ISS if and only if there exists a Lipschitz continuous ISS Lyapunov function for* (4).

A. Main result and structure of the paper

The central result in this paper is the following theorem:

Theorem 4. *Let $\Sigma = (X, \mathscr{U}, \phi)$ be a forward complete system satisfying the BRS and the REP property. Then the relations depicted in Figure 2 hold.*

Black arrows show implications or equivalences which hold for the class of infinite dimensional systems defined in Definition 1; blue arrows are valid for semi-linear systems of the class (4) *under additional assumptions; the red arrows (with the negation sign) are implications which do not hold, due to the counterexamples presented in this paper; the question marks indicate that it is not known to us, whether or not the converse implication holds.*

Proof: Follows from Theorems 5, 8. The counterexamples for the red arrows are discussed in Section VI, see Remark 7. ∎

For ODEs all the combinations in Figure 2 are equivalent as for system (7) we have that AG $\wedge$ 0-GAS is equivalent to ISS by to Proposition 1. In contrast, for infinite-dimensional systems these notions are divided into several groups, which are not equivalent to each other.

The proof of Theorem 4 will be given in several steps.

The upper level in Figure 2 consists of notions, which are equivalent to ISS. As in the ODE case, ISS is equivalent to the uniform asymptotic gain property, and to the existence of a Lipschitz continuous Lyapunov function. By Example 1, ISS is not equivalent to combinations of AG or LIM together with LS or 0-UGAS. But it turns out, that ISS is equivalent to the combination of ULIM and LS. This shows that uniformity of attractivity/reachability plays a much more important role in the infinite-dimensional setting than it does in the ODE case. The main result in this respect is:

Theorem 5. *Let $\Sigma = (X, \mathscr{U}, \phi)$ be a forward complete control system. The following statements are equivalent:*

(i) Σ *is ISS.*
(ii) Σ *is UAG, REP, and, BRS.*
(iii) Σ *is ULIM, ULS, and BRS.*
(iv) Σ *is ULIM and UGS.*

Proof: The proof of this result is divided into several lemmas, which will be shown in Section IV. Here we show how the result follows from them.

(i) $\Rightarrow$ (ii). It is immediate that ISS implies REP and BRS. The remaining claim is shown in Lemma 4.

(ii) $\Rightarrow$ (iii). Evidently, UAG implies ULIM. By Lemma 5 UAG $\wedge$ REP implies ULS.

(iii) $\Rightarrow$ (iv). Let Σ be ULIM and ULS. By Proposition 7, ULIM together with BRS implies pUGS. By Lemma 3, UGS is equivalent to pUGS $\wedge$ ULS.

(iv) $\Rightarrow$ (ii). It is clear that UGS implies REP and BRS. The claim follows using Lemma 6.

(ii) $\Rightarrow$ (i). Follows from the equivalence (ii) $\Leftrightarrow$ (iv) and Lemma 7. ∎

The next step in the outline of the proof of Theorem 4 is as follows. In Section V we introduce the new concept of strong input-to-state stability (sISS). For nonlinear ODE systems this is equivalent to ISS, see Proposition 9, and for linear infinite-dimensional systems without inputs sISS is equivalent to strong stability of the associated semigroup T (which justifies the name "strong" for this notion). We show in Theorem 8 that

$$\text{sISS} \quad \Leftrightarrow \quad \text{sAG} \wedge \text{UGS} \quad \Leftrightarrow \quad \text{sLIM} \wedge \text{GS}.$$

On the other hand, ISS implies the combination AG $\wedge$ 0-UGAS, which is very different from sISS: sISS does not imply the existence of a uniform convergence rate for the undisturbed system (and thus, it does not imply 0-UGAS). At the same time AG $\wedge$ 0-UGAS does not ensure the existence of uniform global bounds for a system with inputs, i.e. GS is not implied.

Below the level of sISS and AG $\wedge$ 0-UGAS there are further levels with even weaker properties. The counterexamples, discussing delicate properties of infinite-dimensional systems and giving the necessary counterexamples for Figure 2 are discussed in detail in Section VI.

Finally, we specialize ourselves to the important subclass of infinite-dimensional systems described by (4) and discuss the proof of the blue (dashed) implications. The equivalences labeled by Theorems 2 and 3 are cited from the literature and included to provide a broader picture. We show in Section VII that for such systems standard assumptions on the nonlinearity f together with the BRS property imply robustness of the trivial equilibrium. This helps to make our main result more precise for systems of the form (4).

Theorem 6. *Let* (4) *satisfy Assumption 1 and property "$\diamondsuit$" from Theorem 2. Then the following statements are equivalent.*

(i) (4) *is ISS.*
(ii) (4) *is UAG and BRS.*
(iii) (4) *is ULIM, ULS and BRS.*
(iv) (4) *is ULIM and UGS.*
(v) (4) *is ULIM, 0-ULS, and BRS.*

Proof: By Lemma 10, it holds for system (4) that Assumption 1 together with BRS implies REP. In conjunction with Theorem 5 this shows equivalence of (i) – (iv).

Clearly, (iii) implies (v). Assume that (4) is ULIM, 0-ULS, and BRS. By the BRS property the value

$$\tilde{\beta}(r,t) := \sup\{\|\phi(t,x,0)\| \ : \ x \in B_r\}$$

is finite for all $(r,t) \in \mathbb{R}_+^2$. The function $\tilde{\beta}$ is increasing in r. Also for fixed $r \geq 0$ we claim that $\lim_{t\to\infty} \tilde{\beta}(r,t) = 0$ by ULIM

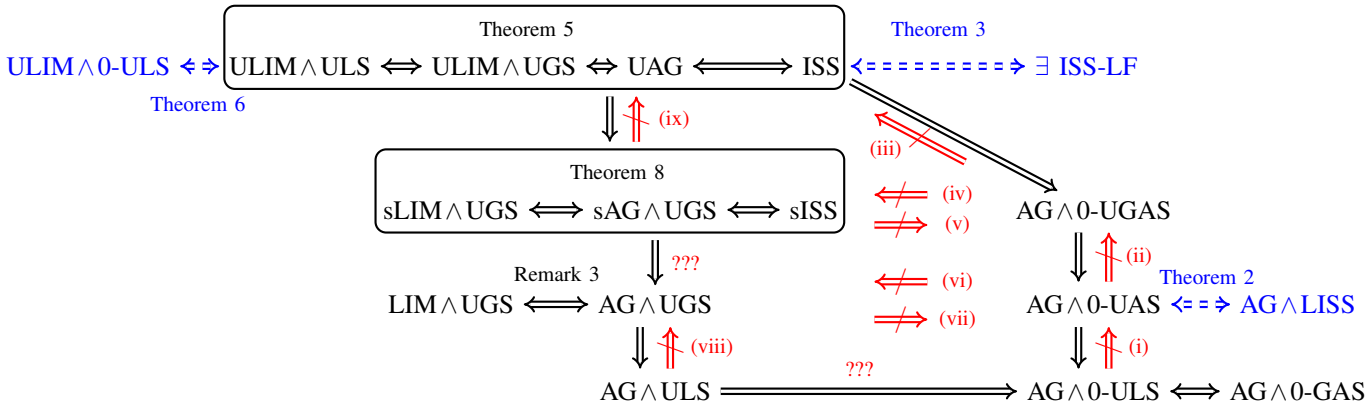

Fig. 2: Relations between stability properties of infinite-dimensional systems, which have a robust equilibrium point and bounded reachability sets:

- Black arrows show implications or equivalences which hold for general control systems in infinite dimensions.
- Red arrows (with the negation sign) are implications which do not hold, due to the counterexamples presented in this paper (see Remark 7).
- Blue dashed equivalences are proved only for systems of the form (4) and under certain additional conditions.
- Question marks mean that it is not known right now (as far as the authors are concerned), whether the converse implications hold or not.

and 0-ULS. To see this let σ be the function characterizing 0-ULS. Given $\varepsilon > 0$ we may by ULIM choose a $\tau > 0$ such that for all $x \in B_r$ there is a $t \leq \tau$ with

$$\|\phi(t,x,0)\| \leq \sigma^{-1}(\varepsilon).$$

By 0-ULS and the cocycle property it follows that $\|\phi(t,x,0)\| \leq \varepsilon$ for all $t \geq \tau$ so that we have the desired convergence. We now have that for all $x \in X$ and all $t \geq 0$

$$\|\phi(t,x,0)\| \leq \max\{\tilde{\beta}(\|x\|,t+s) \,:\, s \geq 0\} + \|x\|e^{-t}.$$

This upper bound is well-defined, strictly increasing in $\|x\|$ and strictly decreasing in t. If necessary, we can upper bound it by a continuous $\beta \in \mathcal{KL}$. It follows that (4) is 0-UGAS.

Since we suppose that the assumption "$\diamondsuit$" of Theorem 2 holds, Theorem 2 implies LISS (and in particular, ULS) of (4). Hence, (v) implies (iii). ■

This completes the proof of Theorem 4.

In Section VIII we show that our results contain Proposition 1 as a special case. This is done by proving that the notions of LIM and ULIM coincide for ODE systems.

Finally, we specialize our results to the system (4) without inputs to obtain characterizations of 0-UGAS.

IV. Characterizations of ISS

The technical results needed to prove Theorem 5 will be divided into 2 parts. First in Section IV-A we recall restatements of BRS and ULS. Next in Section IV-B we prove our main technical lemmas. We assume throughout this section that Σ is a forward complete system.

A. Stability and boundedness of reachable sets

We start with a standard reformulation of the ε-δ formulations of stability in terms of $\mathcal{K}$-functions (the proof is straightforward and thus omitted).

Lemma 1. *System Σ is ULS if and only if for all $\varepsilon > 0$ there exists a $\delta > 0$ such that*

$$\|x\|_X \leq \delta,\ \|u\|_{\mathscr{U}} \leq \delta,\ t \geq 0 \ \Rightarrow\ \|\phi(t,x,u)\|_X \leq \varepsilon. \qquad (27)$$

Lemma 1 can be interpreted as follows: the system Σ is ULS if and only if 0 is a robust equilibrium of Σ and the function δ in Definition 3 is independent of the time h.

It is useful to have a restatement of the BRS property in a comparison-functions-like manner.

We call a function $h : \mathbb{R}^3_+ \to \mathbb{R}_+$ increasing, if $(r_1,r_2,r_3) \leq (R_1,R_2,R_3)$ implies that $h(r_1,r_2,r_3) \leq h(R_1,R_2,R_3)$, where we use the component-wise partial order on $\mathbb{R}^3_+$. We call h strictly increasing if $(r_1,r_2,r_3) \leq (R_1,R_2,R_3)$ and $(r_1,r_2,r_3) \neq (R_1,R_2,R_3)$ imply $h(r_1,r_2,r_3) < h(R_1,R_2,R_3)$.

We have the following lemma:

Lemma 2. *Consider a forward complete system Σ. The following statements are equivalent:*

(i) Σ has bounded reachability sets.

(ii) there exists a continuous, increasing function $\mu : \mathbb{R}^3_+ \to \mathbb{R}_+$, such that for all $x \in X, u \in \mathscr{U}$ and all $t \geq 0$ we have

$$\|\phi(t,x,u)\|_X \leq \mu(\|x\|_X, \|u\|_{\mathscr{U}}, t). \qquad (28)$$

(iii) there exists a continuous function $\mu : \mathbb{R}^3_+ \to \mathbb{R}_+$ such that for all $x \in X, u \in \mathscr{U}$ and for all $t \geq 0$ the inequality (28) holds.

The proof is analogous to the the proof of [22, Lemma 2.12] and is omitted.

Finally, we recall [2, Lemma I.2], which was shown for ODEs, but is proved in the same way for Σ.

Lemma 3. *Consider a forward complete system Σ. Then Σ is ULS and pUGS if and only if it is UGS.*

B. Proof of Theorem 5

We start with a simple lemma:

Lemma 4. *If Σ is ISS, then it is UAG.*

Proof: Let Σ be ISS with the corresponding $\beta \in \mathcal{KL}$ and $\gamma \in \mathcal{K}_\infty$. Take arbitrary $\varepsilon, r > 0$. Define $\tau = \tau(\varepsilon, r)$ as the solution of the equation $\beta(r,\tau) = \varepsilon$ (if it exists, then it is unique, because of monotonicity of β in the second argument,

if it does not exist, we set $\tau(\varepsilon,r):=0$). Then for all $t\geq\tau$, all $x\in X$ with $\|x\|_X\leq r$ and all $u\in\mathscr{U}$ we have

$$\begin{aligned}\|\phi(t,x,u)\|_X &\leq \beta(\|x\|_X,t)+\gamma(\|u\|_{\mathscr{U}})\\ &\leq \beta(\|x\|_X,\tau)+\gamma(\|u\|_{\mathscr{U}})\\ &\leq \varepsilon+\gamma(\|u\|_{\mathscr{U}}),\end{aligned}$$

and the estimate (18) holds. ∎

Lemma 5. *If Σ is UAG and REP, then it is ULS.*

Proof: We will show that (27) holds so that the claim follows from Lemma 1. Let τ and γ be the functions given by (18). Let $\varepsilon>0$ and $\tau:=\tau(\varepsilon/2,1)$. Pick any $\delta_1>0$ so that $\gamma(\delta_1)<\varepsilon/2$. Then for all $x\in X$ with $\|x\|_X\leq 1$ and all $u\in\mathscr{U}$ with $\|u\|_{\mathscr{U}}\leq\delta_1$ we have

$$\sup_{t\geq\tau}\|\phi(t,x,u)\|_X\leq\frac{\varepsilon}{2}+\gamma(\|u\|_{\mathscr{U}})<\varepsilon. \tag{29}$$

Since Σ is REP, there is some $\delta_2=\delta_2(\varepsilon,\tau)>0$ so that

$$\|\eta\|_X\leq\delta_2\ \wedge\ \|u\|_{\mathscr{U}}\leq\delta_2\quad\Rightarrow\quad\sup_{t\in[0,\tau]}\|\phi(t,\eta,u)\|_X\leq\varepsilon.$$

Together with (29), this proves (27) with $\delta:=\min\{1,\delta_1,\delta_2\}$. ∎

We proceed with

Proposition 7. *Assume that Σ is BRS and has the uniform limit property. Then Σ is pUGS.*

Proof: Pick any $r>0$ and set $\varepsilon:=\frac{r}{2}$. Since Σ has the uniform limit property, there exists a $\tau=\tau(r)$ so that

$$x\in\overline{B_r},\,u\in\mathscr{U}\ \Rightarrow\ \exists t\leq\tau:\ \|\phi(t,x,u)\|_X\leq\frac{r}{2}+\gamma(\|u\|_{\mathscr{U}}). \tag{30}$$

In particular, if $x\in\overline{B_r}$, $\|u\|_{\mathscr{U}}\leq\gamma^{-1}(\frac{r}{4})$ then there exists a $t\leq\tau$ such that

$$\|\phi(t,x,u)\|_X\leq\frac{3r}{4}. \tag{31}$$

Without loss of generality we can assume that τ is increasing in r, in particular, it is locally integrable. Defining $\bar\tau(r):=\frac{1}{r}\int_r^{2r}\tau(s)ds$ we see that $\bar\tau(r)\geq\tau(r)$ and $\bar\tau$ is continuous.

Since Σ is BRS, Lemma 2 implies that there exists a continuous, increasing function $\mu:\mathbb{R}^3_+\to\mathbb{R}_+$, such that for all $x\in X,u\in\mathscr{U}$ and all $t\geq 0$ the estimate (28) holds. This implies that

$$x\in\overline{B_r},\,\|u\|_{\mathscr{U}}\leq\gamma^{-1}(\tfrac{r}{4}),t\leq\tau(r)\ \Rightarrow\ \|\phi(t,x,u)\|_X\leq\tilde\sigma(r), \tag{32}$$

where $\tilde\sigma:r\mapsto\mu\big(r,\gamma^{-1}(\frac{r}{4}),\tau(r)\big)$ is continuous and increasing, since μ,γ,τ are continuous increasing functions. Also from (31) and (32) it is clear that $\tilde\sigma(r)\geq\frac{3r}{4}$ for any $r>0$.

Assume that there exist $x\in\overline{B_r}$, $u\in\mathscr{U}$ with $\|u\|_{\mathscr{U}}\leq\gamma^{-1}(\frac{r}{4})$ and $t\geq 0$ so that $\|\phi(t,x,u)\|_X>\tilde\sigma(r)$. Define

$$t_m:=\sup\{s\in[0,t]:\|\phi(s,x,u)\|_X\leq r\}\geq 0.$$

The quantity t_m is well-defined, since $\|\phi(0,x,u)\|_X=\|x\|_X\leq r$ due to the identity property (Σ2).

In view of the cocycle property Σ5, it holds that

$$\phi(t,x,u)=\phi\big(t-t_m,\phi(t_m,x,u),u(\cdot+t_m)\big),$$

and $u(\cdot+t_m)\in\mathscr{U}$, since Σ satisfies the axiom of shift invariance. Assume that $t-t_m\leq\tau(r)$. Since $\|\phi(t_m,x,u)\|_X\leq r$, (32) implies that $\|\phi(t,x,u)\|_X\leq\tilde\sigma(r)$ for all $t\in[t_m,t]$. Otherwise, if $t-t_m>\tau(r)$, then due to (31) there exists $t^*<\tau(r)$, so that

$$\big\|\phi\big(t^*,\phi(t_m,x,u),u(\cdot+t_m)\big)\big\|_X=\|\phi(t^*+t_m,x,d)\|_X\leq\frac{3r}{4},$$

which contradicts the definition of t_m, since $t_m+t^*<t$. Hence

$$x\in\overline{B_r},\,\|u\|_{\mathscr{U}}\leq\gamma^{-1}(\tfrac{r}{4}),t\geq 0\ \Rightarrow\ \|\phi(t,x,u)\|_X\leq\tilde\sigma(r). \tag{33}$$

Denote $\sigma(r):=\tilde\sigma(r)-\tilde\sigma(0)$, for any $r\geq 0$. Clearly, $\sigma\in\mathscr{K}_\infty$.

For each $x\in X$ and $u\in\mathscr{U}$ we can pick $r:=\max\{\|x\|_X,4\gamma(\|u\|_{\mathscr{U}})\}$ and (33) immediately shows for all $x\in X,\ u\in\mathscr{U},\ t\geq 0$ that

$$\begin{aligned}\|\phi(t,x,u)\|_X &\leq \sigma\big(\max\{\|x\|_X,4\gamma(\|u\|_{\mathscr{U}})\}\big)+\tilde\sigma(0)\\ &\leq \sigma(\|x\|_X)+\sigma\big(4\gamma(\|u\|_{\mathscr{U}})\big)+\tilde\sigma(0),\end{aligned}$$

which shows pUGS of Σ. ∎

Lemma 6. *If Σ is ULIM and UGS, then Σ is UAG.*

Proof: Without loss of generality assume that γ in the definitions of ULIM and UGS is the same (otherwise take the maximum of the two).

Pick any $\varepsilon>0$ and any $r>0$. By the uniform limit property, there exists $\gamma\in\mathscr{K}_\infty$, independent of ε and r, and $\tau=\tau(\varepsilon,r)$ so that for any $x\in\overline{B_r}$, $u\in\overline{B_{r,\mathscr{U}}}$ there exists a $t\leq\tau$ so that $\|\phi(t,x,u)\|_X\leq\varepsilon+\gamma(\|u\|_{\mathscr{U}})$.

In view of the cocycle property, we have from the UGS property that for the above x,u,t and any $s\geq 0$

$$\begin{aligned}\|\phi(s+t,x,u)\|_X &= \|\phi(s,\phi(t,x,u),u(s+\cdot))\|_X\\ &\leq \sigma(\|\phi(t,x,u)\|_X)+\gamma(\|u\|_{\mathscr{U}})\\ &\leq \sigma(\varepsilon+\gamma(\|u\|_{\mathscr{U}}))+\gamma(\|u\|_{\mathscr{U}}).\end{aligned}$$

Now let $\tilde\varepsilon:=\sigma(2\varepsilon)>0$. Using the evident inequality $\sigma(a+b)\leq\sigma(2a)+\sigma(2b)$, which holds for any $a,b\geq 0$, we proceed to

$$\|\phi(s+t,x,u)\|_X\leq\tilde\varepsilon+\tilde\gamma(\|u\|_{\mathscr{U}}),$$

where $\tilde\gamma(r)=\sigma(2\gamma(r))+\gamma(r)$.

Overall, for any $\tilde\varepsilon>0$ and any $r>0$ there exists $\tau=\tau(\varepsilon,r)=\tau(\frac{1}{2}\sigma^{-1}(\tilde\varepsilon),r)$, so that for $t\geq\tau$ we have

$$\|\phi(t,x,u)\|_X\leq\tilde\varepsilon+\tilde\gamma(\|u\|_{\mathscr{U}}).$$

This shows that Σ is UAG. ∎

The final technical lemma of this section is:

Lemma 7. *If Σ is UAG and UGS, then Σ is ISS.*

Proof: Fix arbitrary $r\in\mathbb{R}_+$. We are going to construct a function $\beta\in\mathscr{KL}$ so that (21) holds.

From global stability it follows that there exist $\gamma,\sigma\in\mathscr{K}_\infty$ such that for all $t\geq 0$, all $x\in\overline{B_r}$ and all $u\in\mathscr{U}$ we have

$$\|\phi(t,x,u)\|_X\leq\sigma(r)+\gamma(\|u\|_{\mathscr{U}}). \tag{34}$$

Define $\varepsilon_n:=2^{-n}\sigma(r)$, for $n\in\mathbb{N}$. The UAG property implies that there exists a sequence of times $\tau_n:=\tau(\varepsilon_n,r)$, which we

may without loss of generality assume to be strictly increasing, such that for all $x \in \overline{B_r}$ and all $u \in \mathscr{U}$

$$\|\phi(t,x,u)\|_X \leq \varepsilon_n + \gamma(\|u\|_{\mathscr{U}}) \quad \forall t \geq \tau_n.$$

From (34) we see that we may set $\tau_0 := 0$. Define $\omega(r,\tau_n) := \varepsilon_{n-1}$, for $n \in \mathbb{N}$, $n \neq 0$.

Now extend the definition of ω to a function $\omega(r,\cdot) \in \mathscr{L}$. We obtain for $t \in (\tau_n, \tau_{n+1})$, $n = 0,1,\ldots$ and $x \in B_r$ that $\|\phi(t,x,u)\|_X \leq \varepsilon_n + \gamma(\|u\|_{\mathscr{U}}) < \omega(r,t) + \gamma(\|u\|_{\mathscr{U}})$. Doing this for all $r \in \mathbb{R}_+$ we obtain the definition of the function ω.

Now define $\hat{\beta}(r,t) := \sup_{0 \leq s \leq r} \omega(s,t) \geq \omega(r,t)$ for $(r,t) \in \mathbb{R}^2_+$. From this definition it follows that, for each $t \geq 0$, $\hat{\beta}(\cdot,t)$ is increasing in r and $\hat{\beta}(r,\cdot)$ is decreasing in t for each $r > 0$ as every $\omega(r,\cdot) \in \mathscr{L}$. Thus, $\hat{\beta} + |r|e^{-t}$ may be upper bounded by a continuous $\beta \in \mathscr{KL}$ and the estimate (21) is satisfied with such a β. ∎

V. Strong ISS

As has been shown in Lemma 8, the combination of the properties AG and UGS is weaker than ISS. Therefore it is natural to ask for a weaker property than ISS which is equivalent to the combination AG ∧ UGS. In this section we prove a partial result of this kind.

Definition 12. *System Σ is called strongly input-to-state stable (sISS), if there exist $\gamma \in \mathscr{K}$, $\sigma \in \mathscr{K}_\infty$ and $\beta : X \times \mathbb{R}_+ \to \mathbb{R}_+$, so that*

1) *$\beta(x,\cdot) \in \mathscr{L}$ for all $x \in X$, $x \neq 0$*
2) *$\beta(x,t) \leq \sigma(\|x\|_X)$ for all $x \in X$ and all $t \geq 0$*
3) *for all $x \in X$, all $u \in \mathscr{U}$ and all $t \geq 0$ it holds that*

$$\|\phi(t,x,u)\|_X \leq \beta(x,t) + \gamma(\|u\|_{\mathscr{U}}). \tag{35}$$

Remark 6. *Clearly, ISS implies sISS, but not vice versa.*

Strong ISS can be characterized as follows.

Theorem 8. *Let $\Sigma = (X, \mathscr{U}, \phi)$ be a forward complete control system. The following statements are equivalent.*

(i) *Σ is sISS.*
(ii) *Σ is sAG and UGS.*
(iii) *Σ is sLIM and UGS.*

Proof: (i) ⇒ (ii). Let Σ be sISS with the corresponding $\beta : X \times \mathbb{R}_+ \to \mathbb{R}_+$ and $\sigma \in \mathscr{K}_\infty$ and $\gamma \in \mathscr{K}$. By definition, Σ is UGS characterized by σ and γ.

Fix any $x \in X$ and any $\varepsilon > 0$. Define $\tau = \tau(\varepsilon,x)$ as the solution of the equation $\beta(x,\tau) = \varepsilon$ (if this solution exists, then it is unique, because of the monotonicity of β in the second argument, if it does not exist, we set $\tau(\varepsilon,x) = 0$). Then for all $t \geq \tau$ and all $u \in \mathscr{U}$

$$\begin{aligned} \|\phi(t,x,u)\|_X &\leq \beta(x,t) + \gamma(\|u\|_{\mathscr{U}}) \\ &\leq \beta(x,\tau) + \gamma(\|u\|_{\mathscr{U}}) \\ &\leq \varepsilon + \gamma(\|u\|_{\mathscr{U}}), \end{aligned}$$

and the estimate (17) holds. Thus, sISS implies sAG.

(ii) ⇒ (iii). This is clear.

(iii) ⇒ (ii). Can be proved along the lines of Lemma 6.

(ii) ⇒ (i). Assume that Σ is UGS and sAG. Fix an arbitrary $\delta \in \mathbb{R}_+$ and any $x \in X$ with $\|x\|_X \leq \delta$. We are going to construct $\beta : X \times \mathbb{R}_+ \to \mathbb{R}_+$ with the properties as in Definition 12, so that (35) holds.

Uniform global stability of Σ implies that there exist $\sigma, \gamma \in \mathscr{K}_\infty$ so that for all $t \geq 0$ and for all $u \in \mathscr{U}$ it holds that

$$\|\phi(t,x,u)\|_X \leq \sigma(\delta) + \gamma(\|u\|_{\mathscr{U}}).$$

Define $\varepsilon_n := 2^{-n}\sigma(\delta)$, for $n \in \mathbb{N}$. Due to sAG there exists a sequence of times $\tau_n := \tau(\varepsilon_n,x)$, which we assume without loss of generality to be strictly increasing in n, such that

$$\|\phi(t,x,u)\|_X \leq \varepsilon_n + \gamma(\|u\|_{\mathscr{U}}) \quad \forall u \in \mathscr{U},\ \forall t \geq \tau_n.$$

Define $\beta(x,\tau_n) := \varepsilon_{n-1}$, for $n \in \mathbb{N}$, $n \neq 0$.

Now extend the function $\beta(x,\cdot)$ for $t \in \mathbb{R}_+ \setminus \{\tau_n, n \in \mathbb{N}\}$ so that $\beta(x,\cdot) \in \mathscr{L}$ and $\beta(x,t) \leq 2\sigma(\|x\|_X)$ for all $t \geq 0$ (this can be done by choosing the values of $\beta(x,t)$ sufficiently small for $t \in [0,\tau_1)$).

The function β satisfies the estimate (35), because for all $t \in (\tau_n, \tau_{n+1})$ it holds that $\|\phi(t,x,u)\|_X \leq \varepsilon_n + \gamma(\|u\|_{\mathscr{U}}) < \beta(x,t) + \gamma(\|u\|_{\mathscr{U}})$. Performing this procedure for all $x \in X$ we obtain the definition of the function β. This shows Σ is sISS. ∎

VI. Counterexamples

Before we proceed to our main examples, let us take a quick look at linear systems.

Lemma 8. *For linear infinite-dimensional systems of the form (4), i.e. systems with $f \equiv 0$, sAG ∧ UGS does not imply LISS.*

Proof: Consider the linear system $\dot{x} = Ax$, where A is the generator of a C_0-semigroup $T(\cdot)$. For this system it is observed in [25] that ISS is equivalent to 0-UGAS which is in turn equivalent to exponential stability of the semigroup $T(\cdot)$. By linearity and as there is no input these properties are also equivalent to LISS.

Also, as there is no input sAG is equivalent to AG. On the other hand, using linearity we have the equivalences AG ∧ UGS ⇔ AG ∧ ULS ⇔ 0-GATT ∧ 0-ULS ⇔ 0-GAS ⇔ strong stability of $T(\cdot)$ (for the last equivalence see Remark 1). Since strong stability of a semigroup does not imply exponential stability in general, the claim of the lemma follows. ∎

In this section we construct two nonlinear systems without inputs Σ^1, Σ^3, and two nonlinear systems with inputs Σ^2, Σ^4 providing counterexamples which show that the following implications are false:

Σ^1: (Σ1) ∧ 0-GAS ∧ 0-UAS $\not\Rightarrow$ BRS.
Σ^2: (Σ1) ∧ 0-UGAS ∧ AG ∧ LISS $\not\Rightarrow$ BRS.
Σ^3: (Σ1) ∧ BRS ∧ 0-GAS ∧ 0-UAS $\not\Rightarrow$ 0-UGS.
Σ^4: (Σ1) ∧ BRS ∧ 0-UGAS ∧ AG ∧ LISS $\not\Rightarrow$ UGS.

Remark 7. *Before we proceed to the constructions of the systems Σ^i, let show how they justify the negated implications depicted in Figure 2.*

(i) *Follows from Lemma 8.*
(ii) *Follows by construction of Σ^3.*
(iii) *Follows by construction of Σ^4.*
(iv) *Follows by construction of Σ^4.*

(v) *Follows from Lemma 8.*
(vi) *Follows by construction of* Σ^3 *and/or* Σ^4.
(vii) *Follows from Lemma 8.*
(viii) *Follows by construction of* Σ^4.
(ix) *Follows from Lemma 8.*

In addition, we recall that Example 1, which is fully discussed in [15], shows that 0-UGAS $\wedge$ *sAG* $\wedge$ *AG with zero gain* $\wedge$ *UGS with zero gain* $\wedge$ *LISS with zero gain do not imply ISS (and even do not imply ULIM). Hence, the properties of the "second" level (sISS and AG* $\wedge$ *0-UGAS) not only are different from each other (in the sense that they do not imply each other), but also even taken together they do not imply ISS.*

Finally, systems Σ^1 *and* Σ^2 *show that the systems with global nonuniform attractivity properties together with very strong properties near the equilibrium may not even be BRS.*

Example 2 $((\Sigma 1) \wedge \text{0-GAS} \wedge \text{0-UAS} \not\Rightarrow \text{BRS})$**.** *According to Remark 1 for linear infinite-dimensional systems 0-GAS implies 0-UGS. Now we show that for nonlinear systems 0-GAS does not even imply BRS of the undisturbed system. Consider the nonlinear infinite-dimensional system* Σ^1 *defined by*

$$\Sigma^1 : \left\{ \begin{array}{l} \Sigma^1_k : \left\{ \begin{array}{l} \dot{x}_k = -x_k + x_k^2 y_k - \frac{1}{k^2} x_k^3, \\ \dot{y}_k = -y_k. \end{array} \right. \\ k = 1, 2, \ldots, \end{array} \right. \tag{36}$$

with the state space

$$X := l_2 = \left\{ (z_k)_{k=1}^{\infty} : \sum_{k=1}^{\infty} |z_k|^2 < \infty, \quad z_k = (x_k, y_k) \in \mathbb{R}^2 \right\}. \tag{37}$$

We show that Σ^1 *is forward complete, 0-GAS and 0-UAS but does not have bounded reachability sets.*

First we argue that Σ^1 *is 0-UAS. Indeed, for* $r < 1$ *the Lyapunov function* $V(z) = \|z\|_{l_2}^2 = \sum_{k=1}^{\infty} (x_k^2 + y_k^2)$ *satisfies for all* z_k *with* $|x_k| \le r$ *and* $|y_k| \le r$, $k \in \mathbb{N}$, *the estimate*

$$\begin{aligned} \dot{V}(z) &= 2 \sum_{k=1}^{\infty} (-x_k^2 + x_k^3 y_k - \frac{1}{k^2} x_k^4 - y_k^2) \\ &\le 2 \sum_{k=1}^{\infty} (-x_k^2 + |x_k|^3 |y_k| - \frac{1}{k^2} x_k^4 - y_k^2) \\ &\le 2 \sum_{k=1}^{\infty} ((r^2 - 1) x_k^2 - y_k^2) \\ &\le 2(r^2 - 1) V(z). \end{aligned} \tag{38}$$

We see that V *is an exponential local Lyapunov function for the system* (36) *and thus* (36) *is locally uniformly asymptotically stable. Indeed it it not hard to show that the domain of attraction contains* $\{z \in l_2 : |x_k| < r, |y_k| < r, \forall k\}$.

To show forward completeness and global attractivity of Σ^1 *we first point out that every* Σ^1_k *is 0-GAS. This follows from the fact that any* Σ^1_k *is a cascade interconnection of an ISS* x_k*-system (with* y_k *as an input) and a globally asymptotically stable* y_k*-system, see [3].*

Furthermore, for any $z(0) \in l_2$ *there exists a finite* $N > 0$ *such that* $|z_k(0)| \le \frac{1}{2}$ *for all* $k \ge N$. *Decompose the norm of* $z(t)$ *as follows*

$$\|z(t)\|_{l_2} = \sum_{k=1}^{N-1} |z_k(t)|^2 + \sum_{k=N}^{\infty} |z_k(t)|^2.$$

According to the previous arguments, $\sum_{k=1}^{N-1} |z_k(t)|^2 \to 0$ *as* $t \to 0$ *since all* Σ^1_k *are GAS for* $k = 1, \ldots, N-1$. *Also* $\sum_{k=N}^{\infty} |z_k(t)|^2$ *decays monotonically and exponentially to* 0 *as* $t \to \infty$. *Overall,* $\|z(t)\|_{l_2} \to 0$ *as* $t \to \infty$ *which shows that* Σ^1 *is forward complete, 0-GAS and 0-UAS.*

Finally we show that Σ^1 *is not BRS. To prove this, it is enough to show that there exists an* $r > 0$ *and* $\tau > 0$ *so that for any* $M > 0$ *there exist* $z \in l_2$ *and* $t \in [0, \tau]$ *so that* $\|z\|_{l_2} = r$ *and* $\|\phi(t, z, 0)\|_{l_2} > M$.

Let us consider Σ^1_k. *For* $y_k \ge 1$ *and for* $x_k \in [0, k]$ *it holds that*

$$\dot{x}_k \ge -2x_k + x_k^2. \tag{39}$$

Pick an initial state $x_k(0) = c > 0$ *(which is independent of* k*) so that the solution of* $\dot{x}_k = -2x_k + x_k^2$ *blows up to infinity in time* $t^* = 1$. *Now pick* $y_k(0) = e$ *(Euler's constant) for all* $k = 1, 2, \ldots$. *For this initial condition we obtain* $y_k(t) = e^{1-t} \ge 1$ *for* $t \in [0, 1]$. *And consequently for* $z_k(0) = (c, e)^T$ *there exists a time* $\tau_k \in (0, 1)$ *such that* $x_k(\tau_k) = k$ *for the solution of* Σ^1_k.

Now consider an initial state $z(0)$ *for* Σ^1, *where* $z_k(0) = (c, e)^T$ *and* $z_j(0) = (0, 0)^T$ *for* $j \ne k$. *For this initial state we have that* $\|z(t)\|_{l_2} = |z_k(t)|$ *and*

$$\sup_{t \ge 0} \|z(t)\|_{l_2} = \sup_{t \ge 0} |z_k(t)| \ge |x_k(\tau_k)| \ge k.$$

As $k \in \mathbb{N}$ *was arbitrary, this shows that the system* Σ^1 *is not BRS.* □

Example 3 $((\Sigma 1) \wedge \text{0-UGAS} \wedge \text{AG} \wedge \text{LISS} \not\Rightarrow \text{BRS})$**.** *In this modification of Example 2 it is demonstrated that 0-UGAS* $\wedge$ *AG* $\wedge$ *LISS does not imply BRS. Let* Σ^2 *be defined by*

$$\Sigma^2 : \left\{ \begin{array}{l} \Sigma^2_k : \left\{ \begin{array}{l} \dot{x}_k = -x_k + x_k^2 y_k |u| - \frac{1}{k^2} x_k^3, \\ \dot{y}_k = -y_k. \end{array} \right. \\ k = 1, 2, \ldots, \end{array} \right.$$

And let the state space of Σ^2 *be* l_2 *(see* (37)*) and its input space be* $\mathscr{U} := PC(\mathbb{R}_+, \mathbb{R})$.

Evidently, this system is 0-UGAS. Also it is clear that Σ^2 *is not BRS, since for* $u \equiv 1$ *we obtain exactly the system from Example 2, which is not BRS. The proof that this system is forward complete, LISS and AG with zero gain mimics the argument we exploited to show 0-GATT of Example 2 and thus we omit it.* □

Example 4 $((\Sigma 1) \wedge \text{BRS} \wedge \text{0-GAS} \wedge \text{0-UAS} \not\Rightarrow \text{0-UGS})$**.** *We construct a counterexample in 3 steps.*

Step 1. *Let us revisit Example 2 and find useful estimates from above for the dynamics of the subsystems* Σ^1_k.

We first note that for initial conditions $z_k^0 = (x_k^0, y_k^0)$ *with* $x_k^0 y_k^0 \le 0$ *we have for the solutions of* Σ^k_1 *(see* (36)*) that* $|z_k(t)| \le |z_k^0|$ *for all* $t \ge 0$.

It is easy to check that for each $k \in \mathbb{N}$ *and each* $z_k(0) = (x_k(0), y_k(0)) \in \mathbb{R}^2$ *with* $y_k(0) x_k(0) > 0$ *the solution of* Σ^1_k *for the initial condition* $z_k(0)$ *(see* (36)*) can be estimated in norm by*

$$|x_k(t)| \le |\hat{x}_k(t)|$$

where $\hat{x}_k(t)$ is the first component of the solution of the system

$$\hat{\Sigma}^1_k : \begin{cases} \dot{\hat{x}}_k(t) = \hat{x}_k^2(t) y_k(0) \\ \dot{y}_k = -y_k. \end{cases} \tag{40}$$

with initial condition $\hat{z}_k(0) = (\hat{x}_k(0), y_k(0)) = (x_k(0), y_k(0))$.

This solution of the $\hat{x}_k$-subsystem of (40) *reads as*

$$\hat{x}_k(t) = \frac{x_k(0)}{1 - t y_k(0) x_k(0)},$$

and this solution exists for $t \in [0, \frac{1}{y_k(0)x_k(0)})$.

Now pick any $R > 0$ and assume that $z_k(0) = (x_k(0), y_k(0)) \in B_R$. Since

$$\frac{1}{y_k(0)x_k(0)} \geq \frac{2}{y_k^2(0) + x_k^2(0)} \geq \frac{2}{R^2},$$

the solutions of (40) *for any initial condition $z_k(0) \in B_R$ exist at least on the time interval $[0, 2R^{-2})$. Moreover, for every such solution for $t \in [0, (2y_k(0)x_k(0))^{-1})$ (and in particular for $t \in [0, R^{-2}]$) it holds that*

$$|\hat{x}_k(t)| \leq 2|x_k(0)|.$$

Overall, for each $R > 0$, all $k \in \mathbb{N}$, all $z_k(0) = (x_k(0), y_k(0)) \in B_R$ and all $t \in [0, R^{-2}]$ the solution of Σ^1_k corresponding to the initial condition $z_k(0)$ satisfies

$$|z_k(t)| = \sqrt{x_k^2(t) + y_k^2(t)} \leq \sqrt{\hat{x}_k^2(t) + y_k^2(t)} \leq 2|z_k(0)|. \tag{41}$$

Step 2. *Now we are going to modify the system Σ^1 by using time transformations. Define $\tilde{x}_k(t) := x_k(\frac{t}{k})$, $\tilde{y}_k(t) := y_k(\frac{t}{k})$, for any $t \geq 0$ and any $k \geq 1$. In other words, we make the time of the kth mode k times slower than the time of Σ^1_k. This new system we denote by $\tilde{\Sigma}^1$. The equations defining $\tilde{\Sigma}^1$ are*

$$\tilde{\Sigma}^1 : \begin{cases} \tilde{\Sigma}^1_k : \begin{cases} \dot{\tilde{x}}_k = \frac{1}{k}\big(-\tilde{x}_k + \tilde{x}_k^2 \tilde{y}_k - \frac{1}{k^2}\tilde{x}_k^3\big), \\ \dot{\tilde{y}}_k = -\frac{1}{k}\tilde{y}_k. \end{cases} \\ k = 1, 2, \ldots \end{cases} \tag{42}$$

Again the state space of $\tilde{\Sigma}^1$ is l_2, see (37)*.*

From the computation in (38) *it is easy to obtain that for the dynamics of $\tilde{\Sigma}^1$ we have $\dot{V}(z) \leq 0$ if $\|z\|_{l_2} \leq 1$. It follows that for all $z(0) \in l_2$ with $\|z(0)\|_{l_2} \leq 1$ we have*

$$\|z(t)\|_X \leq \|z(0)\|_X,$$

and therefore $\tilde{\Sigma}^1$ is 0-ULS.

Forward completeness and global attractivity of $\tilde{\Sigma}^1$ can be shown along the lines of Example 2. This shows that $\tilde{\Sigma}^1$ is 0-GAS.

Let us prove that $\tilde{\Sigma}^1$ is BRS. Pick any $R > 0$, any time $\tau > 0$ and any $z \in l_2$: $\|z\|_{l_2} \leq R$. In view of (41)*, we have for any $k \in \mathbb{N}$:*

$$|\tilde{z}_k(t)| \leq 2|z_k(0)| \quad \forall\, t \in [0, kR^{-2}]. \tag{43}$$

Hence there is a $N = N(R, \tau)$ so that the estimate (43) *holds for all $z \in B_R$, all $k \geq N$ and for all $t \in [0, \tau]$. Thus, for all $z \in B_R$ and all $t \in [0, \tau]$ we have*

$$\begin{aligned} \|z(t)\|_X^2 &= \sum_{k=1}^{N-1} |z_k(t)|^2 + \sum_{k=N}^{\infty} |z_k(t)|^2 \\ &\leq \sum_{k=1}^{N-1} |z_k(t)|^2 + 4 \sum_{k=N}^{\infty} |z_k(0)|^2 \\ &\leq \sum_{k=1}^{N-1} |z_k(t)|^2 + 4R^2. \end{aligned}$$

Since N is finite and depends on R and τ only, and since every z_k-subsystem is GAS, it is clear that

$$\sup\{\|z(t)\|_{l_2} \,:\, \|z(0)\|_{l_2} \leq R,\ t \in [0, \tau]\} < \infty,$$

so that $\tilde{\Sigma}^1$ is BRS.

In order to show that $\tilde{\Sigma}^1$ is not 0-UGS, recall the construction in Example 2. Consider an initial state $z(0)$ for $\tilde{\Sigma}^1$, where $\tilde{z}_k(0) = (c, e)^T$ and $\tilde{z}_j(0) = (0, 0)^T$ for $j \neq k$. For this initial state we have that $\|\tilde{z}(t)\|_{l_2} = |\tilde{z}_k(t)| \geq |\tilde{x}_k(t)| = |x_k(\frac{t}{k})|$. And hence

$$\sup_{t \geq 0} \|\tilde{z}(t)\|_{l_2} \geq |\tilde{x}_k(k\tau_k)| = |x_k(\tau_k)| \geq k.$$

As $k \in \mathbb{N}$ was arbitrary, this shows that the system $\tilde{\Sigma}^1$ is not 0-UGS.

Step 3. *Let c be as in Step 2. Let $a := \min\{c, \frac{1}{2}\}$ and choose a smooth function $\xi : \mathbb{R} \to \mathbb{R}$ with*

$$\xi(s) := \begin{cases} s & , \text{ if } |s| \leq \frac{a}{4}, \\ 0 & , \text{ if } |s| > \frac{a}{2}, \\ \in [-\frac{a}{2}, -\frac{a}{4}] \cup [\frac{a}{4}, -\frac{a}{2}], & , \text{ otherwise.} \end{cases}$$

Now consider the modification of $\tilde{\Sigma}^1$, which we denote Σ^3.

$$\Sigma^3 : \begin{cases} \Sigma^3_k : \begin{cases} \dot{\tilde{x}}_k = -\xi(\tilde{x}_k) + \frac{1}{k}\big(-\tilde{x}_k + \tilde{x}_k^2 \tilde{y}_k - \frac{1}{k^2}\tilde{x}_k^3\big), \\ \dot{\tilde{y}}_k = -\xi(\tilde{y}_k) - \frac{1}{k}\tilde{y}_k. \end{cases} \\ k = 1, 2, \ldots \end{cases} \tag{44}$$

The additional dynamics generated by ξ improve the stability properties of Σ^3 when compared to $\tilde{\Sigma}^1$. In particular, since $\tilde{\Sigma}^1$ is forward complete, 0-GAS, BRS, Σ^3 also has these properties. Moreover, in a neighborhood of the origin the dynamics of Σ^3_k is dominated by the term $-\xi(\tilde{x}_k) = -\tilde{x}_k$ and $-\xi(\tilde{y}_k) = -\tilde{y}_k$ respectively, which renders Σ^3 0-UAS. This can be formally justified e.g. by a Lyapunov argument, as in Example 2.

At the same time, since $\xi(s) = 0$ for $s > \frac{a}{2}$, the argument, used to show that $\tilde{\Sigma}$ is not 0-UGS, shows that Σ^3 is again not 0-UGS. □

Example 5 (FC $\wedge$ BRS $\wedge$ 0-UGAS $\wedge$ AG $\wedge$ LISS $\not\Rightarrow$ UGS)**.** *Consider the system Σ^4 with the state space l_2 (see* (37)*) and its input space be $\mathscr{U} := PC(\mathbb{R}_+, \mathbb{R})$.*

$$\Sigma^4 : \begin{cases} \Sigma^4_k : \begin{cases} \dot{\tilde{x}}_k = -\xi(\tilde{x}_k) + \frac{1}{k}\big(-\tilde{x}_k + \tilde{x}_k^2 \tilde{y}_k |u| - \frac{1}{k^2}\tilde{x}_k^3\big), \\ \dot{\tilde{y}}_k = -\xi(\tilde{y}_k) - \frac{1}{k}\tilde{y}_k. \end{cases} \\ k = 1, 2, \ldots \end{cases} \tag{45}$$

Since this example is a combination of the two previous ones, we omit all details and just mention that Σ^4 is forward complete, BRS, 0-UGAS, LISS and AG with zero gain, but at the same time Σ^4 is not UGS. □

VII. Robustness of equilibria for differential equations in Banach spaces

In this section we show that for system (4) satisfying Assumption 1, boundedness of reachability sets implies the REP property. This technical result is needed for the proof of Theorem 6.

Definition 13. *The flow of* (4) *is called Lipschitz continuous on compact intervals (for uniformly bounded inputs), if for any $\tau > 0$ and any $R > 0$ there exists $L > 0$ so that for any $x, y \in \overline{B_R}$, for all $u \in B_{R,\mathscr{U}}$ and all $t \in [0,\tau]$ and it holds that*

$$\|\phi(t,x,u) - \phi(t,y,u)\|_X \leq L\|x-y\|_X. \tag{46}$$

We have the following:

Lemma 9. *Let Assumption 1 hold and assume that* (4) *is BRS. Then* (4) *has a flow which is Lipschitz continuous on compact intervals for uniformly bounded inputs.*

Proof: Pick any $R > 0$, any $x, y \in \overline{B_R}$ and any $u \in B_{R,\mathscr{U}}$. Let $x(t) := \phi(t,x,u)$, $y(t) := \phi(t,y,u)$ be the solutions of (4) defined on the whole nonnegative time axis.

Pick any $\tau > 0$ and set

$$K(R,\tau) := \sup_{\|x\|_X \leq R,\ \|u\|_{\mathscr{U}} \leq R,\ t\in[0,\tau]} \|\phi(t,x,u)\|_X,$$

which is finite since (4) is BRS.

Note also that there exist $M, \lambda > 0$ such that $\|T(t)\| \leq Me^{\lambda t}$ for all $t \geq 0$. We have for any $t \in [0,\tau]$:

$$\begin{aligned}
&\|x(t) - y(t)\|_X \\
&\leq \|T(t)\|\|x-y\|_X \\
&\quad + \int_0^t \|T(t-s)\|\|f(x(r),u(r)) - f(y(r),u(r))\|_X dr \\
&\leq Me^{\lambda t}\|x-y\|_X + L(K(R,\tau)) \int_0^t Me^{\lambda(t-r)}\|x(r)-y(r)\|_X dr.
\end{aligned}$$

Define $z_1(t) := e^{-\lambda t}x(t)$, $z_2(t) := e^{-\lambda t}y(t)$. We can rewrite the above implications as

$$\begin{aligned}
\|z_1(t) - z_2(t)\|_X \leq& M\|x-y\|_X \\
&+ ML(K(C,\tau)) \int_0^t \|z_1(r) - z_2(r)\|_X dr.
\end{aligned}$$

According to Grönwall's inequality we obtain for $t \in [0,\tau]$:

$$\|z_1(t) - z_2(t)\|_X \leq M\|x-y\|_X e^{ML(K(C,\tau))t},$$

or equivalently

$$\begin{aligned}
\|x(t) - y(t)\|_X &\leq M\|x-y\|_X e^{(ML(K(C,\tau))+\lambda)t} \\
&\leq Me^{(ML(K(C,\tau))+\lambda)\tau}\|x-y\|_X,
\end{aligned}$$

which proves the lemma. ∎

Now we show that 0 is a robust equilibrium of (4).

Lemma 10. *Let Assumption 1 holds and assume that* (4) *is BRS. Then* 0 *is a robust equilibrium point of* (4).

Proof: Pick any $\varepsilon > 0$, $\tau \geq 0$, $\delta > 0$ and choose any $x \in X$ with $\|x\|_X \leq \delta$ as well as any $u \in B_{\delta,\mathscr{U}}$. It holds that

$$\|\phi(t,x,u)\|_X \quad \leq \quad \|\phi(t,x,u) - \phi(t,0,u)\|_X + \|\phi(t,0,u)\|_X.$$

By Lemma 9, the flow of (4) is Lipschitz continuous on compact time intervals. Hence there exists a $L(\tau,\delta)$ so that for $t \in [0,\tau]$

$$\|\phi(t,x,u) - \phi(t,0,u)\|_X \leq L(\tau,\delta)\|x\|_X \leq L(\tau,\delta)\delta.$$

Let us estimate $\|\phi(t,0,u)\|_X$. We have:

$$\begin{aligned}
\|\phi(t,0,u)\|_X =& \Big\| \int_0^t T(t-s) f(\phi(s,0,u),u(s))ds \Big\|_X \\
&\leq \int_0^t \|T(t-s)\| \Big(\big\| f(\phi(s,0,u),u(s)) - f(0,u(s)) \big\|_X \\
&\qquad + \|f(0,u(s))\|_X \Big) ds.
\end{aligned}$$

Since $f(0,\cdot)$ is continuous, for any $\varepsilon_2 > 0$ there exists $\delta_2 < \delta$ so that $u(s) \in B_{\delta_2}$ implies that $\|f(0,u(s)) - f(0,0)\|_X \leq \varepsilon_2$. Since $f(0,0) = 0$ due to Assumption 1, for the above u we have $\|f(0,u(s))\|_X \leq \varepsilon_2$.

Due to the BRS property, there exists $K(\tau,\delta_2)$ with $\|\phi(s,0,u)\|_X \leq K(\tau,\delta_2)$ for any $u \in B_{\delta_2,\mathscr{U}}$ and $s \in [0,\tau]$. Now, Lipschitz continuity of f shows that

$$\|\phi(t,0,u)\|_X \quad \leq \quad \int_0^t Me^{\lambda(t-s)} \big(L(K(\tau,\delta))\|\phi(s,0,u)\|_X + \varepsilon_2 \big) ds.$$

Define $z(t) := e^{-\lambda t}\phi(t,0,u)$, for $t \in [0,\tau]$. We have

$$\|z(t)\|_X \quad \leq \quad ML(K(\tau,\delta_2)) \int_0^t \|z(s)\|_X ds + M\tau\varepsilon_2.$$

Now Grönwall Lemma implies that

$$\|z(t)\|_X \quad \leq \quad M\tau\varepsilon_2 e^{ML(K(\tau,\delta_2))t},$$

in other words

$$\|\phi(t,0,u)\|_X \quad \leq \quad M\tau\varepsilon_2 e^{(ML(K(\tau,\delta_2))+\lambda)t},$$

Overall, for $x \in B_{\delta_2}$, for $u \in B_{\delta_2,\mathscr{U}}$ and for $t \in [0,\tau]$ we have

$$\|\phi(t,x,u)\|_X \quad \leq \quad L(\tau,\delta_2)\delta_2 + M\tau\varepsilon_2 e^{(ML(K(\tau,\delta_2))+\lambda)\tau}.$$

To finish the proof choose ε_2 and δ_2 small enough to ensure that

$$L(\tau,\delta_2)\delta_2 + M\tau\varepsilon_2 e^{(ML(K(\tau,\delta_2))+\lambda)\tau} \leq \varepsilon.$$

∎

VIII. Characterization of ISS for ODEs

This paper introduces the new properties strong ISS (sISS), strong asymptotic gain and the strong and the uniform limit property (sLIM and ULIM). It is worth pointing out that this yields no new concepts for finite dimensional systems of the form (7). Indeed, for ODE systems Proposition 1 and Theorem 4 shows the equivalence of sISS and ISS. The following Proposition 9 shows that all versions of the limit property coincide in the finite dimensional case. For systems without inputs, finite dimensional examples of fixed points that attractive but not stable show that sAG does not imply UAG even for systems of the form (7). At the moment it is not clear whether AG implies sAG.

Proposition 9. *Assume the finite-dimensional system* (7) *is forward-complete. Then* (7) *is LIM if and only if it is ULIM.*

Proof: It is clear that ULIM implies LIM. For the converse statement we will make use of [2, Corollary III.3]. The result may be applied as follows. Assume (7) is LIM and let $\gamma \in \mathscr{K}_\infty$ be the corresponding gain. Fix $\varepsilon > 0$, $r > 0$ and $R > 0$. By the LIM property, for all $x_0 \in \mathbb{R}^n$ and all $u \in \mathscr{U}$ with $\|u\|_\infty \le R$ there is a time $t \ge 0$ such that $|\phi(t,x,u)| \le \frac{\varepsilon}{2} + \gamma(R)$. Then [2, Corollary III.3] states that there is a $\tau = \tau(\varepsilon, r, R)$ such that for all $x \in \overline{B_r}$, $u \in B_{R,\mathscr{U}}$ there exists a $t \le \tau(\varepsilon, r, R)$ such that

$$|\phi(t,x,u)| \le \varepsilon + \gamma(R). \tag{47}$$

With this argument at hand, we now proceed to show ULIM. Fix $\varepsilon > 0$ and $r > 0$. We are going to find a $\tau = \tau(\varepsilon, r)$ for which the ULIM property holds. Define $R_1 := \gamma^{-1}(\max\{r - \varepsilon, 0\})$. Then for each $u \in \mathscr{U}$: $\|u\|_\infty \ge R_1$ and each $x \in \overline{B_r}$ it holds that

$$|\phi(0,x,u)| = |x| \le r \le \varepsilon + \gamma(R_1) \le \varepsilon + \gamma(\|u\|_\infty),$$

and the time $t(\varepsilon, r, u)$ in the definition of ULIM can be chosen for such u as $t := 0$.

Now set $\tau_1 := \tau(\frac{\varepsilon}{2}, r, R_1)$. Then by the argument leading to (47) we have for all $x \in \overline{B_r}$ and $u \in \mathscr{U}$: $\|u\|_\infty \le R_1$ a time $t \le \tau_1$ such that

$$|\phi(t,x,u)| \le \varepsilon + \gamma(R_1) - \frac{\varepsilon}{2}. \tag{48}$$

Define

$$R_2 := \gamma^{-1}\Big(\max\big\{\gamma(R_1) - \frac{\varepsilon}{2}, 0\big\}\Big) = \gamma^{-1}\Big(\max\big\{r - \frac{3\varepsilon}{2}, 0\big\}\Big).$$

From (48) we obtain for all u with $R_2 \le \|u\|_\infty \le R_1$ that for the above t

$$|\phi(t,x,u)| \le \varepsilon + \gamma(\|u\|_\infty).$$

For $k \in \mathbb{N}$ define the times $\tau_k := \tau(\frac{\varepsilon}{2}, r, R_k)$ and

$$R_k := \gamma^{-1}\Big(\max\big\{\gamma(R_{k-1}) - \frac{\varepsilon}{2}, 0\big\}\Big) = \gamma^{-1}\Big(\max\big\{r - \frac{(k+1)\varepsilon}{2}, 0\big\}\Big).$$

Repeating the previous argument we see that for all $x \in \overline{B_r}$ and all $u \in \mathscr{U}$ with $R_{k+1} \le \|u\|_\infty \le R_k$ there is a time $t \le \tau_k$ such that $|\phi(t,x,u)| \le \varepsilon + \gamma(\|u\|_\infty)$. The procedure ends after finitely many steps because eventually $r - \frac{(k+1)\varepsilon}{2}$ becomes negative. The claim now follows for $\tau := \max\big\{\tau_k \mid k = 1, \ldots, \lfloor \frac{2r}{\varepsilon} \rfloor + 1\big\}$, where $\lfloor \cdot \rfloor$ denotes the integer part of a real number. ∎

IX. Systems without inputs

In this section we classify the stability notions for abstract systems $\Sigma = (X, \phi, 0)$ without inputs. We feel that this simplified picture can be helpful in understanding the general case and at the same time it is interesting in its own right.

We start with a lemma.

Lemma 11. *Σ is 0-LIM and 0-ULS if and only if Σ is 0-GAS.*

Proof: It is clear that 0-GAS implies 0-LIM and 0-ULS. So we only prove the converse direction.

Pick any $x \in X$. Since Σ is 0-ULS, for any $\varepsilon > 0$ there exists a $\delta = \delta(\varepsilon) > 0$ such that $\|x\|_X \le \delta$ implies $\|\phi(t,x,0)\|_X \le \varepsilon$ for all $t \ge 0$. Pick any such ε, and denote it by ε_1 with the corresponding δ_1. Since Σ is 0-LIM, for this $\delta_1 > 0$ there exists a $T_1 = T_1(x) > 0$ such that $\|\phi(T_1,x,0)\|_X \le \delta_1$. Due to the semigroup property, $\phi(t+T_1,x,0) = \phi(t,\phi(T_1,x,0),0)$ and consequently $\|\phi(t+T_1,x,0)\|_X \le \varepsilon_1$ for all $t \ge 0$.

Pick a sequence $\{\varepsilon_i\}_{i=1}^\infty$ with $\varepsilon_i \to 0$ as $i \to \infty$. According to the above argument, there exists a sequence of times $T_i = T_i(x)$ such that $\|\phi(t,x,0)\|_X \le \varepsilon_i$ for all $t \ge T_i$, and thus $\|\phi(t,x,0)\|_X \to 0$ as $t \to \infty$. This shows that Σ is 0-GATT, and since we assumed that Σ is 0-ULS, Σ is also 0-GAS. ∎

In [22] a notion of a non-coercive Lyapunov function has been introduced

Definition 14. *A continuous function $V : X \to \mathbb{R}_+$ is called a non-coercive Lyapunov function for the undisturbed system Σ, if there exist $\psi_2 \in \mathscr{K}_\infty$, $\alpha \in \mathscr{K}_\infty$ and $\sigma \in \mathscr{K}$ such that*

$$0 < V(x) \le \psi_2(\|x\|_X), \quad \forall x \in X \backslash \{0\} \tag{49}$$

and the Dini derivative of V along the trajectories of the system Σ subject to $u \equiv 0$ satisfies

$$\dot{V}_0(x) \le -\alpha(\|x\|_X) \tag{50}$$

for all $x \in X$.

Note, that in the definition of a non-coercive Lyapunov function we do not require existence of $\psi_1 \in \mathscr{K}_\infty$: $\psi_1(\|x\|_X) \le V(x)$ for all $x \in X$. From the main result in [22] it follows that:

Proposition 10. *Let Σ be BRS and REP. Then Σ is 0-UGAS if and only if Σ possesses a non-coercive Lyapunov function.*

Now we can state the main result of this section

Proposition 11. *For the system Σ without inputs the relations depicted in Figure 3 hold.*

Proof: The equivalences on the uniform level follow directly from the equivalence between UAG and ISS. 0-GAS is equivalent to 0-GATT ∧ 0-ULS according to the definition of 0-GAS, and it is equivalent to 0-LIM ∧ 0-ULS according to Lemma 11.

The implications (2) follow since 0-UAS ⇔ 0-UGAS and 0-ULS ⇔ 0-UGS for linear systems. The implications (1) are well-known.

The observation that 0-UAS ∧ 0-GATT is not implied by and does not imply 0-GAS ∧ 0-UGS follows from Example 2 and since strong stability of strongly continuous semigroups is weaker than exponential stability. ∎

X. Conclusion and relation to previous results

In this paper we have studied characterizations of ISS properties for infinite-dimensional systems over Banach spaces.

We proved that ISS of infinite-dimensional systems is equivalent to the uniform asymptotic gain property and to the combination of local stability with the uniform limit property, introduced here. These results form a proper generalization of well-known characterizations of ISS for systems of ordinary differential equations, proved by Sontag and Wang in [2]. In contrast to this, we show by means of several counterexamples, that other characterizations of ISS, known to hold for ODE systems [2], are no longer valid for infinite-dimensional systems. In particular, the combinations of asymptotic or

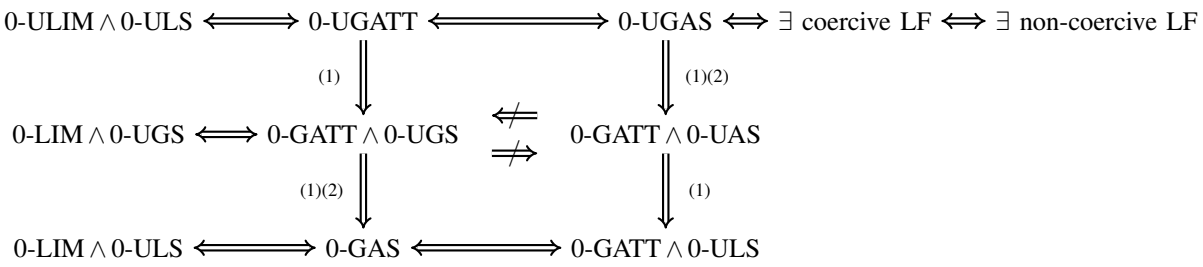

Fig. 3: Characterizations of 0-UGAS for systems, satisfying BRS and REP properties. Implications marked by (1) resp. (2) become equivalences for (1) ODE systems, see e.g. [26, Proposition 2.5] and (2) linear systems (as a consequence of the Banach-Steinhaus theorem).

limit property with uniform global stability are much weaker properties than ISS.

We introduce a new notion of strong ISS (sISS), which is equivalent to ISS for nonlinear ODE systems and is equivalent to strong stability of C_0-semigroups for linear dynamical systems with inputs. In order to characterize strong ISS we introduce natural notions of strong asymptotic gain and strong limit property, and prove that combination of any of these properties together with uniform global stability is equivalent to sISS.

By means of counterexamples we show the relations between ISS, sISS and other stability properties, and show that the properties, which were equivalent to ISS for ODE systems are divided in the infinite-dimensional world into several nonequivalent groups of notions.

In a separate section we specialize the results of this paper to systems without external inputs and relate these results to the recent characterization of uniform global asymptotic stability by means of non-coercive Lyapunov functions, proved in [22].

A number of questions related to characterizations of strong ISS remain open. In particular it is not known, whether any of following implications hold for nonlinear infinite-dimensional systems: LIM $\Rightarrow$ sLIM, AG $\Rightarrow$ sAG, AG $\wedge$ UGS $\Rightarrow$ sAG $\wedge$ UGS. The answer to these questions will expand considerable our understanding of ISS theory of infinite-dimensional systems.

A further interesting and promising direction of research would be to characterize ISS by means of non-coercive ISS Lyapunov functions.

REFERENCES

[1] A. Mironchenko and F. Wirth, "Restatements of input-to-state stability in infinite dimensions: what goes wrong?" in *Proc. 22th International Symposium on Mathematical Theory of Systems and Networks*, 2016, pp. 667–674.

[2] E. D. Sontag and Y. Wang, "New characterizations of input-to-state stability," *IEEE Transactions on Automatic Control*, vol. 41, no. 9, pp. 1283–1294, 1996.

[3] E. D. Sontag, "Smooth stabilization implies coprime factorization," *IEEE Transactions on Automatic Control*, vol. 34, no. 4, pp. 435–443, 1989.

[4] R. A. Freeman and P. V. Kokotović, *Robust Nonlinear Control Design: State-Space and Lyapunov Techniques*. Boston, MA: Birkhäuser, 2008.

[5] M. Arcak and P. Kokotović, "Nonlinear observers: a circle criterion design and robustness analysis," *Automatica*, vol. 37, no. 12, pp. 1923–1930, 2001.

[6] Z.-P. Jiang, A. R. Teel, and L. Praly, "Small-gain theorem for ISS systems and applications," *Mathematics of Control, Signals, and Systems*, vol. 7, no. 2, pp. 95–120, 1994.

[7] S. Dashkovskiy, B. S. Rüffer, and F. R. Wirth, "An ISS small gain theorem for general networks," *Mathematics of Control, Signals, and Systems*, vol. 19, no. 2, pp. 93–122, 2007.

[8] S. Dashkovskiy, B. Rüffer, and F. Wirth, "Small gain theorems for large scale systems and construction of ISS Lyapunov functions," *SIAM Journal on Control and Optimization*, vol. 48, no. 6, pp. 4089–4118, 2010.

[9] S. Dashkovskiy and A. Mironchenko, "Input-to-state stability of infinite-dimensional control systems," *Mathematics of Control, Signals, and Systems*, vol. 25, no. 1, pp. 1–35, 2013.

[10] A. Mironchenko and H. Ito, "Characterizations of integral input-to-state stability for bilinear systems in infinite dimensions," *Mathematical Control and Related Fields*, vol. 6, no. 3, pp. 447–466, 2016.

[11] ——, "Construction of Lyapunov functions for interconnected parabolic systems: An iISS approach," *SIAM Journal on Control and Optimization*, vol. 53, no. 6, pp. 3364–3382, 2015.

[12] F. Mazenc and C. Prieur, "Strict Lyapunov functions for semilinear parabolic partial differential equations," *Mathematical Control and Related Fields*, vol. 1, no. 2, pp. 231–250, 2011.

[13] B. Jayawardhana, H. Logemann, and E. P. Ryan, "Infinite-dimensional feedback systems: the circle criterion and input-to-state stability," *Communications in Information and Systems*, vol. 8, no. 4, pp. 413–444, 2008.

[14] I. Karafyllis and M. Krstic, "ISS with respect to boundary disturbances for 1-D parabolic PDEs," *IEEE Transactions on Automatic Control*, vol. 61, no. 12, pp. 3712–3724, 2016.

[15] A. Mironchenko, "Local input-to-state stability: Characterizations and counterexamples," *Systems & Control Letters*, vol. 87, pp. 23–28, 2016.

[16] B. Jacob, R. Nabiullin, J. R. Partington, and F. Schwenninger, "Infinite-dimensional input-to-state stability and Orlicz spaces," *ArXiv e-prints*, 2016.

[17] E. D. Sontag and Y. Wang, "On characterizations of the input-to-state stability property," *Systems & Control Letters*, vol. 24, no. 5, pp. 351–359, 1995.

[18] A. R. Teel, "Connections between Razumikhin-type theorems and the ISS nonlinear small-gain theorem," *IEEE Transactions on Automatic Control*, vol. 43, no. 7, pp. 960–964, 1998.

[19] S. Dashkovskiy, M. Kosmykov, A. Mironchenko, and L. Naujok, "Stability of interconnected impulsive systems with and without time delays, using Lyapunov methods," *Nonlinear Analysis: Hybrid Systems*, vol. 6, no. 3, pp. 899–915, 2012.

[20] S. Dashkovskiy and M. Kosmykov, "Input-to-state stability of interconnected hybrid systems," *Automatica*, vol. 49, no. 4, pp. 1068–1074, 2013.

[21] A. Mironchenko and F. Wirth, "A Lyapunov characterization of input-to-state stability for control systems on Banach spaces," 2017, in preparation.

[22] ——, "Non-coercive Lyapunov functions for infinite-dimensional systems," *arxiv.org/abs/1612.06575*, 2016, submitted.

[23] T. Cazenave and A. Haraux, *An Introduction To Semilinear Evolution Equations*. New York: Oxford University Press, 1998.

[24] D. Henry, *Geometric Theory of Semilinear Parabolic Equations*. Berlin: Springer-Verlag, 1981.

[25] A. Mironchenko and F. Wirth, "A note on input-to-state stability of linear and bilinear infinite-dimensional systems." in *Proc. of the 54th IEEE Conference on Decision and Control*, 2015, pp. 495–500.

[26] Y. Lin, E. D. Sontag, and Y. Wang, "A smooth converse Lyapunov theorem for robust stability," *SIAM Journal on Control and Optimization*, vol. 34, no. 1, pp. 124–160, 1996.

Andrii Mironchenko received his MSc at the I.I. Mechnikov Odessa National University in 2008 and his PhD at the University of Bremen in 2012. He has held research position at the University of Würzburg, Germany and was a Postdoctoral JSPS fellow at the Kyushu Institute of Technology (2013–2014). In 2014 he joined the Faculty of Mathematics and Computer Science at the University of Passau, Germany. His research interests include infinite-dimensional systems, stability theory, hybrid systems and applications of control theory to biological systems.

Fabian Wirth received his PhD from the Institute of Dynamical Systems at the University of Bremen in 1995. He has since held positions in Bremen, at the Centre Automatique et Systèmes of Ecole des Mines, the Hamilton Institute at NUI Maynooth, Ireland, the University of Würzburg and IBM Research Ireland. He now holds the chair for Dynamical Systems at the University of Passau in Germany. His current interests include stability theory, queueing networks, switched systems and large scale networks with applications to networked systems and in the domain of smart cities.